

COMFORT+


COLOUR 8580-66002



Please be aware that the colour shades can appear different from the real fabric colours. We advise you to request actual fabric samples before ordering.

COLOUR SCALE

Design no. 8580 Comfort+ (140 cm/55") is available in 77 colours

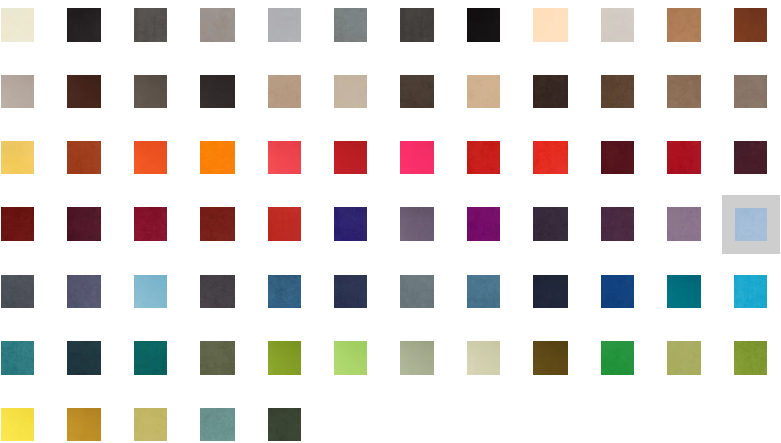

Comfort+ is an extremely versatile and durable microfiber upholstery fabric. It is antistatic, fire-resistant and stains are removed with ease. It is machine washable and can even be disinfected with ethanol. Moreover, it is environmentally-friendly, dimensionally stable, breathable and soft – and retains its appearance year after year. Properties that make Comfort+ an All- terrain fabric.

Meets Möbelfakta requirements

Designed by: Gabriel Design Team
Colours designed by: Cenk Kivrikoglu



PRODUCT SPECIFICATIONS

CHARACTERISTICS

Design no.

8580 — Comfort+

Application

Upholstery

Composition

51% Polyester, 37% Post-consumer rec.pes., 12% Polyurethane incl. antistatic fibers and fire retardant fibers in the backside

Weight

385 g/lm — 12.42 oz/lin.yd

Width

140 cm — 55 inches

PERFORMANCE

Abrasion

150,000 — rubs martindale (EN ISO 12947-2)

Pilling

5 — scale 1-5, max. 5 (EN ISO 12945-2)

Light fastness

5-7 — scale 1-8, max. 8 (EN ISO 105-B02)

Rubbing fastness dry/wet

4/4-5 — scale 1-5, max. 5 (EN ISO 105x12)

Flammability

BS EN 1021 1&2 Cigarette and Match

BS EN 1021-1 Cigarette

ÖNORM A3800-B2-B3825-Q1 UK

NF P 92-503 M3

CA TB 117-2013

Will also pass other flammability standards.

Flame retardant performance is dependent upon the foam used.

US ACT pass

 CA TB 117-2013

CERTIFICATES

ABRASION RESISTANCE

Test	Condition	No.	Date	Download
BS EN ISO 12947-2/14465	In accordance with EN 14465	28512157-A	03 Feb 2022	PDF

PILLING

Test	Condition	No.	Date	Download
BS EN ISO 12945-2		A 893562-2	10 Jan 2020	PDF

COLOUR FASTNESS TO LIGHT

Test	Condition	No.	Date	Download
------	-----------	-----	------	----------

BS EN ISO 105 B02 Method 2	189171	23 Mar 2017	PDF
----------------------------	--------	-------------	---------------------

DRY AND WET RUBBING/CROCKING

Test	Condition	No.	Date	Download
BS EN ISO 105-X12 Rubbing dry/wet		2021AN2683	27 Jan 2022	PDF

FLAMMABILITY

Test	Condition	No.	Date	Download
BS EN 1021 1&2 Cigarette and Match	35 kg/m3 CMHR foam	23/58122-3-2	27 Jan 2021	PDF
BS EN 1021-1 Cigarette	20-22 kg/m3 non-fire retardant polyurethane foam	23/58122-3-1	27 Jan 2021	PDF
ÖNORM A3800-B2-B3825-Q1 UK		75986	23 Mar 2015	PDF
NF P 92-503 M3		367090705	02 Dec 2009	PDF
CA TB 117-2013		3-29635-0	26 Nov 2018	PDF

WASH STABILITY

Test	Condition	No.	Date	Download
BS EN ISO 6330 2A 60C PC Flat Dry		28512157-A	03 Feb 2022	PDF
BS EN ISO 6330 3A 74C PC Flat Dry		82185-01	29 Jan 2017	PDF

COLOUR FASTNESS TO WATER SPOTTING

Test	Condition	No.	Date	Download
BS EN ISO 105-E16		28511316	05 Mar 2021	PDF

MATERIAL SAFETY DATA SHEET

Test	Condition	No.	Date	Download
Material Safety Data Sheet			30 Sep 2021	PDF

CARE & MAINTENANCE

Wash or dry cleaning P(W)

Most stains can be removed by brushing with a suede brush or using an eraser.

Or use a solution of luke-warm water and a neutral detergent.

Click here for guidance relating to disinfection. [Link to Stain Guide...](#)



60°C shrinkage max 2.0%



74°C shrinkage max 2.5%
