


Event Screen+


Colour 8599-67017

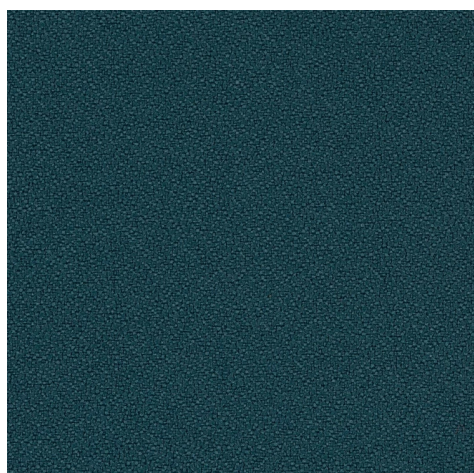

Please be aware that the colour shades can appear different from the real fabric colours. We advise you to request actual fabric samples before ordering.

Colour scale

Design no. 8599 Event Screen+ (170 cm/67") is available in 26 colours

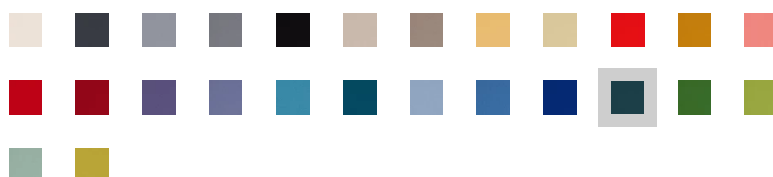

Event Screen+ is a versatile, cross-functional crepe upholstery fabric with a distinctive pebbly texture. It is ideal for screen and panel applications as well as for furniture upholstery. Meeting the requirements for both vertical and horizontal surfaces, Event Screen+ is particularly suitable for privacy furniture such as pods and booths that combine seating and screens.

100% recyclable polyester
Meets Möbelfakta requirements

Design and colours are developed by Inger Mosholt Nielsen

Order

Please sign in to
order fabrics and
samples.



Product specifications

Characteristics

Design no.

8599 — Event Screen+

Application

Upholstery

Panel

Screen

Composition

100% Polyester

Weight

390 g/lm — 12.58 oz/lin.yd

Width

170 cm — 67 inches

Environment

Environment, health, and safety

OEKO-TEX® STANDARD 100

EU Ecolabel

Meets Möbelfakta requirements

VOC emission

Ansi/Bifma VOC test M7.1

Performance

Abrasion

80,000 — rubs martindale (EN ISO 12947-2)

100,000 — double rubs wyzenbeek (ASTM D4157) (heavy duty upholstery)

Pilling

4-5 — scale 1-5, max. 5 (EN ISO 12945-2)

Light fastness

5-7 — scale 1-8, max. 8 (EN ISO 105-B02)

Rubbing fastness dry/wet

4-5/4-5 — scale 1-5, max. 5 (EN ISO 105x12)

Flammability

BS EN 1021-1 Cigarette

BS EN 1021-2 Match

CA TB 117-2013

ASTM E84 Class 1(Unadhered)

BS 476 Part 7 class 1

DIN EN 13501-1 B-s1,d0

DIN EN 13501-1 B-s1,d0(Adhered)

Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemicals.

US ACT pass

A ASTM D4157-07 Wyz abrasion (heavy duty) 100k

✱ ASTM D3511 Pilling

☀ [AATCC 16 Light fastness](#)

☞ [AATCC 8 or 116 Dry/wet crocking](#)

🔥 [CA TB 117-2013](#)

🔥 [ASTM E84 Class 1\(Unadhered\)](#)

Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

Certificates

Acoustic test air flow resistance

Test	Condition	No.	Date	Download
EN 29053 & ISO 9053-1 (airflow resistance)		M104146/21	04 Feb 2015	PDF

Acoustic test sound absorption

Test	Condition	No.	Date	Download
ISO 354 & ISO 11654 (sound absorption)		103008	25 Jun 2009	PDF

Abrasion resistance

Test	Condition	No.	Date	Download
BS EN ISO 12947-2/14465	In accordance with EN 14465	144420207	08 Aug 2025	PDF
ASTM D4157-07 Wyz abrasion (heavy duty) 100k		25-001493	09 Jun 2025	PDF

Pilling

Test	Condition	No.	Date	Download
BS EN ISO 12945-2		144420207b	06 Mar 2026	PDF
ASTM D3511 Pilling		25-001493	09 Jun 2025	PDF

Colour fastness to light

Test	Condition	No.	Date	Download
BS EN ISO 105 B02 Method 2		56503-02	13 Mar 2013	PDF
BS EN ISO 105 B02 Method 2		2025AN1773	09 Jul 2025	PDF
AATCC 16 Light fastness		2025AN1773	09 Jul 2025	PDF

Dry and wet rubbing/crocking

Test	Condition	No.	Date	Download
BS EN ISO 105-X12 Rubbing dry/wet		56503-01	19 Feb 2013	PDF
BS EN ISO 105-X12 Rubbing dry/wet		2025AN1773	09 Jul 2025	PDF
AATCC 8 or 116 Dry/wet crocking		2025AN1773	09 Jul 2025	PDF

Flammability

Test	Condition	No.	Date	Download
BS EN 1021-1 Cigarette	20-22 kg/m3 non-fire retardant polyurethane foam	23/63236I/06/25	27 Jun 2025	PDF
BS EN 1021-2 Match	35 kg/m3 CMHR foam	23/63236I/06/25	27 Jun 2025	PDF
CA TB 117-2013		25-001493	09 Jun 2025	PDF
ASTM E84 Class 1(Unadhered)	Unadhered	3-27495-8	30 Jul 2018	PDF
BS 476 Part 7 class 1		73527	27 Feb 2016	PDF
DIN EN 13501-1 B-s1,d0	Unadhered	2025AN0605	04 Mar 2025	PDF
DIN EN 13501-1 B-s1,d0(Adhered)	Adhered	25AN0607	27 Mar 2025	PDF

Rubbing with organic solvents

Test	Condition	No.	Date	Download
BS EN ISO 105-D02 Organic solvents		82351	28 Jan 2017	PDF

Colour fastness to water spotting

Test	Condition	No.	Date	Download
BS EN ISO 105-E16		82351	28	PDF

Jan
2017

Colour Fastness to Perspiration

Test	Condition	No.	Date	Download
AATCC 15 Perspiration		3-27495-0	31 Jul 2018	PDF
BS EN ISO 105-E04		101075-03	26 Aug 2018	PDF

Seam slippage

Test	Condition	No.	Date	Download
ASTM D4034 Yarn slippage at a sewn seam		3-27419-4	02 Aug 2018	PDF
BS EN ISO 13936-2		101075-03	26 Aug 2018	PDF

Breaking Force

Test	Condition	No.	Date	Download
ASTM D5034 Breaking force		3-27495-5	01 Aug 2018	PDF

Wash stability

Test	Condition	No.	Date	Download
BS EN ISO 6330 6M 60 C PC Flat dry		101509	30 Aug 2018	PDF

VOC emission

Test	Condition	No.	Date	Download
Ansi/Bifma VOC test M7:1		392-2025- 00484401	09 Oct 2025	PDF

Resistance to Bleach Cleaning

Test	Condition	No.	Date	Download
Internal test according BIFMA HCF 8.1 and ACT Method 1	1:10 Sodium Hypochlorite 5,25- 6,25%		05 Oct 2020	PDF

Material Safety Data Sheet

Test	Condition	No.	Date	Download
Material Safety Data Sheet			30 Sep 2021	PDF

Care & Maintenance

Wash or dry cleaning P(W).

Event Screen+ is made of polyester which is a material suited for environments with special requirements for cleaning.

Click here for guidance relating to disinfection. [Link to Stain Guide...](#)



60°C shrinkage max 2.5%