


GAJA ANTISTATIC

COLOUR 2407-66002

Please be aware that the colour shades can appear different from the real fabric colours. We advise you to request actual fabric samples before ordering.

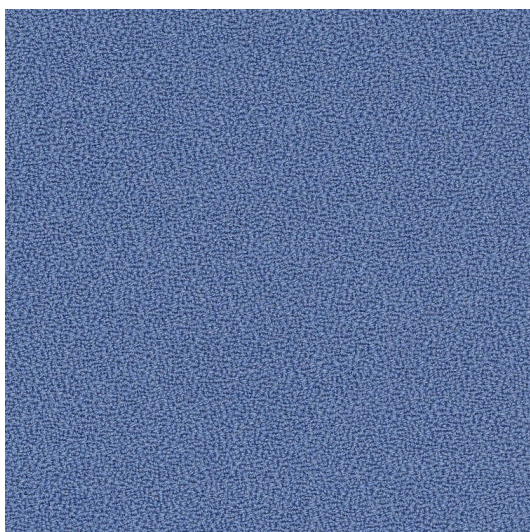

COLOUR SCALE

Design no. 2407 Gaja Antistatic (140 cm/55") is available in 11 colours



Gaja Antistatic is made of 90% New Zealand wool, 5% polyamide and 5% steel fibre. The wool's natural high conductivity and the added steel fibres ensure abrasion resistance and outstanding antistatic properties. Gaja Antistatic is therefore particularly suitable in areas where there are extremely high requirements regarding prevention of static electricity, e.g. in offices with a lot of IT equipment and laboratories and other areas with sensitive measuring equipment.

Designed by: Dorte Bo Bojesen

Colours designed by: Inger Mosholt Nielsen



PRODUCT SPECIFICATIONS

CHARACTERISTICS

Design no.
2407 — Gaja Antistatic

Application
Upholstery

Composition
90% New Zealand wool, 5% Polyamide, 5% Stainless steel

Weight
530 g/lm — 17.09 oz/lin.yd

Width
140 cm — 55 inches

ENVIRONMENT

VOC emission
[Ansi/Bifma VOC test M7.1](#)

PERFORMANCE

Abrasion
50,000 — rubs martindale (EN ISO 12947-2)

Pilling
4-5 — scale 1-5, max. 5 (EN ISO 12945-2)

Light fastness
5-7 — scale 1-8, max. 8 (EN ISO 105-B02)

Rubbing fastness dry/wet
4-5/4-5 — scale 1-5, max. 5 (EN ISO 105x12)

Flammability
[BS EN 1021 1&2 Cigarette and Match](#)
[ÖNORM A3800-B1-B3825-Q1 UK](#)
[CA TB 117-2013](#)

Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemicals.

US ACT pass
 [CA TB 117-2013](#)

CERTIFICATES

ABRASION RESISTANCE

Test	Condition	No.	Date	Download
BS EN ISO 12947-2/14465	In accordance with EN 14465	28515426	11 Dec 2024	PDF

PILLING

Test	Condition	No.	Date	Download
BS EN ISO 12945-2		28515426	11 Dec 2024	PDF

COLOUR FASTNESS TO LIGHT

Test	Condition	No.	Date	Download
BS EN ISO 105 B02 Method 2		144318723	03 Feb 2021	PDF

DRY AND WET RUBBING/CROCKING

Test	Condition	No.	Date	Download
BS EN ISO 105-X12 Rubbing dry/wet		93329-04	07 Feb 2018	PDF

FLAMMABILITY

Test	Condition	No.	Date	Download
BS EN 1021 1&2 Cigarette and Match	20-22 kg/m3 non-fire retardant polyurethane foam	93329	10 Jan 2018	PDF
ÖNORM A3800-B1-B3825-Q1 UK		73041	24 Feb 2014	PDF
CA TB 117-2013		3-29640-0	21 Nov 2018	PDF

ELECTRICAL RESISTIVITY

Test	Condition	No.	Date	Download
BS EN 61340-5-1		82875	07 Mar 2017	PDF

VOC EMISSION

Test	Condition	No.	Date	Download
Ansi/Bifma VOC test M7.1		237145-C	13 Mar 2024	PDF

MATERIAL SAFETY DATA SHEET

Test	Condition	No.	Date	Download
Material Safety Data Sheet			30 Sep 2021	PDF

CARE & MAINTENANCE

Dry cleaning P(S)

