


Go Check


Colour 2450-61138

Colour scale

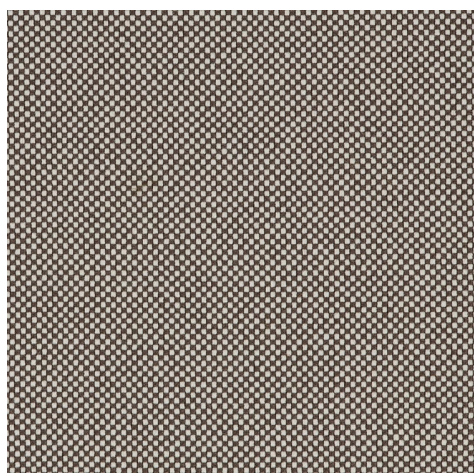

Please be aware that the colour shades can appear different from the real fabric colours. We advise you to request actual fabric samples before ordering.

Design no. 2450 Go Check (140 cm/55") is available in 40 colours

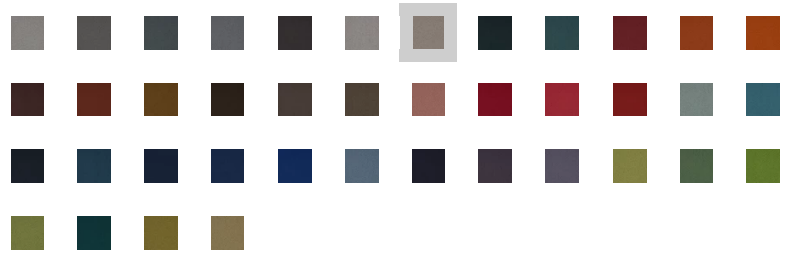

In the world of fashion, haute couture represents the best in design, quality and tailoring. The goal is perfection, exclusivity and luxury in every detail. Made from the cutting-edge material Trevira CS, and by combining an innovative design with an exceptionally strong environmental profile, excellent flame-retardant properties and impressive durability, the Go collection is haute couture for furniture. The collection encompasses three strong designs – Go Uni, Go Check and Go Couture – all of them bound for the catwalk.

Meets Möbelfakta requirements

Design and colours are developed by Inger Mosholt Nielsen

Order

Please sign in to
order fabrics and
samples.



Characteristics

Design no.

2450 — Go Check

Application

Upholstery

Composition

100% Trevira CS

Weight

435 g/lm — 14.03 oz/lin.yd

Width

140 cm — 55 inches

Environment

Environment, health, and safety

OEKO-TEX® STANDARD 100

EU Ecolabel

Meets Möbelfakta requirements

VOC emission

Ansi/Bifma VOC test M7.1

Potential environmental impacts

Environmental Product Declaration (EPD)

Performance

Abrasion

80,000 — rubs martindale (EN ISO 12947-2)

60,000 — double rubs wyzenbeek (ASTM D4157) (heavy duty upholstery)

Pilling

5 — scale 1-5, max. 5 (EN ISO 12945-2)

Light fastness

5-8 — scale 1-8, max. 8 (EN ISO 105-B02)

Rubbing fastness dry/wet

4-5/4-5 — scale 1-5, max. 5 (EN ISO 105x12)

Flammability

BS EN 1021 1&2 Cigarette and Match

BS EN 1021-1 Cigarette

BS 5852 Crib 5

BS 7176 Medium hazard

DIN 4102 - B1

NF P 92-503/504/505 M1

ÖNORM A3800-B1-B3825-Q1 UK

Class Uno UNI 9175 Class 1 I EMME

CA TB 117-2013

DIN EN 13501-1 B-s1,d0

AM 18 - NF D 60-013-(only for fabric)

IMO EC Declaration of Conformity EU,UK

IMO MSC 307(88) Annex 1 part 8

IMO MSC 307(88) Annex 1 part 8 UK

MED Certificate IMO

MED Certificate IMO UK

Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used.

US ACT pass

 CA TB 117-2013

 ASTM D4157-07 Wyz abrasion (heavy duty).

 ASTM D3511 Pilling

 AATCC 16 Light fastness

 AATCC 8 or 116 Dry/wet crocking

Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

Certificates

Abrasion resistance

Test	Condition	No.	Date	Download
BS EN ISO 12947-2/14465	In accordance with EN 14465	28511312	15 Feb 2021	PDF
ASTM D4157-07 Wyz abrasion (heavy duty)		2021AN0618	30 Apr 2021	PDF

Pilling

Test	Condition	No.	Date	Download
BS EN ISO 12945-2		144444142a	02	PDF

Oct
2026

ASTM D3511 Pilling

25-001546

06
Jun
2025

[PDF](#)

Colour fastness to light

Test	Condition	No.	Date	Download
------	-----------	-----	------	----------

BS EN ISO 105 B02
Method 2

2026AN2395

21
Sep
2026

[PDF](#)

AATCC 16 Light fastness

2025AN2086

30
Jul
2025

[PDF](#)

Dry and wet rubbing/crocking

Test	Condition	No.	Date	Download
------	-----------	-----	------	----------

BS EN ISO 105-X12
Rubbing dry/wet

2026AN2532

22
Sep
2026

[PDF](#)

AATCC 8 or 116 Dry/wet
crocking

2025AN2086

30
Jul
2025

[PDF](#)

Flammability

Test	Condition	No.	Date	Download
------	-----------	-----	------	----------

BS EN 1021 1&2 Cigarette
and Match

35 kg/m3 CMHR foam

23/58122-10-
2

20
Jan
2021

[PDF](#)

BS EN 1021-1 Cigarette

20-22 kg/m3 non-fire
retardant polyurethane
foam

23/58122-10-1

27
Jan
2021

[PDF](#)

BS 5852 Crib 5

35 kg/m3 CMHR foam

23/58122-10-

20

[PDF](#)

		2	Jan 2021	
BS 7176 Medium hazard	35 kg/m3 CMHR foam	23/58122-10-2	20 Jan 2021	PDF
DIN 4102 - B1		240041	29 Feb 2024	PDF
NF P 92-503/504/505 M1		CM-22-P-019	07 Mar 2022	PDF
ÖNORM A3800-B1- B3825-Q1 UK		240041	29 Feb 2024	PDF
Class Uno UNI 9175 Class 1 I EMME		240041	29 Feb 2024	PDF
CA TB 117-2013		2443090099a 002	20 Feb 2021	PDF
DIN EN 13501-1 B-s1,d0		Z-56.25-3573	09 Oct 2023	PDF
AM 18 - NF D 60-013- (only for fabric)		PM - 19 - 010	17 Apr 2019	PDF
IMO EC Declaration of Conformity EU,UK			29 Sep 2026	PDF
IMO MSC 307(88) Annex 1 part 8		SH01672	10 Jan 2025	PDF
IMO MSC 307(88) Annex		53164	10	PDF

1 part 8 UK

Jan
2025

MED Certificate IMO

SH01686

07 [PDF](#)
Feb
2025

MED Certificate IMO UK

51367

07 [PDF](#)
Feb
2025

Rubbing with organic solvents

Test	Condition	No.	Date	Download
BS EN ISO 105-D02 Organic solvents		144318717b	22 Mar 2021	PDF

Colour Fastness to Perspiration

Test	Condition	No.	Date	Download
BS EN ISO 105-E04		28511312	15 Feb 2021	PDF

Colour fastness to water spotting

Test	Condition	No.	Date	Download
BS EN ISO 105-E16		28511312	05 Mar 2021	PDF

Seam slippage

Test	Condition	No.	Date	Download
BS EN ISO 13936-2		28511312	15 Feb 2021	PDF

Wash stability

Test	Condition	No.	Date	Download
BS EN ISO 6330 6M 60 C PC Flat dry		28511312	15 Feb 2021	PDF

Resistance to Bleach Cleaning

Test	Condition	No.	Date	Download
Internal test according BIFMA HCF 8.1 and ACT Method 1	1:10 Sodium Hypochlorite 5,25- 6,25%		05 Oct 2020	PDF

VOC emission

Test	Condition	No.	Date	Download
Ansi/Bifma VOC test M7.1		392-2025- 00484401	09 Oct 2025	PDF

Material Safety Data Sheet

Test	Condition	No.	Date	Download
Material Safety Data Sheet			30 Sep 2021	PDF

Potential environmental impacts

Test	Condition	No.	Date	Download
Environmental Product Declaration (EPD)			18 Feb 2026	PDF

Care & Maintenance

Wash or dry cleaning P(W).

Go Check is made of Trevira CS which is a polyester material suited for environments with special requirements for cleaning.

Can be wiped with Virkon S, Actichlor Plus, Prime Source ren-93 or Ethanol (70-85%).

Always follow the manufacturer's instructions and finish by wiping with a damp cloth.

Click here for guidance relating to disinfection. [Link to Stain Guide...](#)



40°C shrinkage max 1.5%



60°C shrinkage max 2.5%



74°C shrinkage max 3.5%
