


Go Couture

Colour 2449-61138


Colour scale

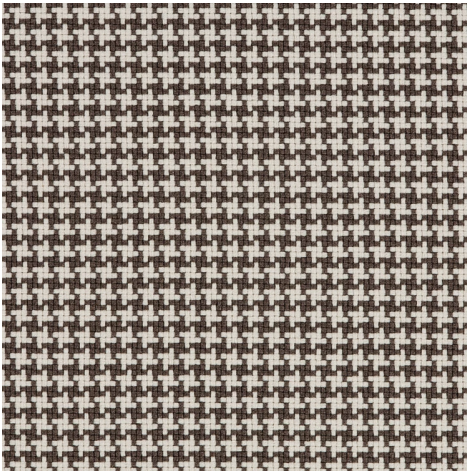

Under discontinuation.

Please be aware that the colour shades can appear different from the real fabric colours. We advise you to request actual fabric samples before ordering.

Design no. 2449 Go Couture (140 cm/55") is available in 39 colours

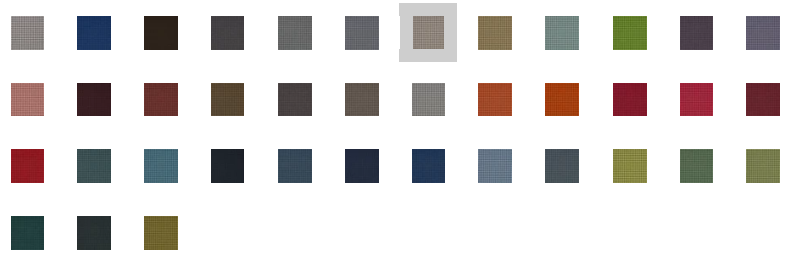

In the world of fashion, haute couture represents the best in design, quality and tailoring. The goal is perfection, exclusivity and luxury in every detail. Made from the cutting-edge material Trevira CS, and by combining an innovative design with an exceptionally strong environmental profile, excellent flame-retardant properties and impressive durability, the Go collection is haute couture for furniture. The collection encompasses three strong designs – Go Uni, Go Check and Go Couture – all of them bound for the catwalk.

Meets Möbelfakta requirements

Design and colours are developed by Inger Mosholt Nielsen

Order

Please sign in to
order fabrics and
samples.



Characteristics

Design no.

2449 — Go Couture

Application

Upholstery

Composition

100% Trevira CS

Weight

435 g/lm — 14.03 oz/lin.yd

Width

140 cm — 55 inches

Environment

Environment, health, and safety

OEKO-TEX® STANDARD 100

EU Ecolabel

Meets Möbelfakta requirements

VOC emission

Ansi/Bifma VOC test M7.1

Potential environmental impacts

Environmental Product Declaration (EPD)

Performance

Abrasion

80,000 — rubs martindale (EN ISO 12947-2)

70,000 — double rubs wyzenbeek (ASTM D4157) (heavy duty upholstery)

Pilling

5 — scale 1-5, max. 5 (EN ISO 12945-2)

Light fastness

5-8 — scale 1-8, max. 8 (EN ISO 105-B02)

Rubbing fastness dry/wet

4-5/4-5 — scale 1-5, max. 5 (EN ISO 105x12)

Flammability

BS EN 1021 1&2 Cigarette and Match

BS EN 1021-1 Cigarette

BS 7176 Medium hazard

BS 5852 Crib 5

DIN 4102 - B1

NF P 92-503/504/505 M1

Class Uno UNI 9175 Class 1 I EMME

ÖNORM A3800-B1-B3825-Q1 UK

FAR/JAR 25.853 (a)_(i)_(ii)

CA TB 117-2013

DIN EN 13501-1 B-s1,d0

AM 18 - NF D 60-013-(only for fabric)

Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used.

US ACT pass

 [AATCC 8 or 116 Dry/wet crocking](#)

 [CA TB 117-2013](#)

 [ASTM D4157-07 Wyz abrasion \(heavy duty\)](#)

 [ASTM D3511 Pilling](#)

 [AATCC 16 Light fastness](#)

Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

Certificates

Abrasion resistance

Test	Condition	No.	Date	Download
BS EN ISO 12947-2/14465	In accordance with EN 14465	28511294	15 Feb 2021	PDF
ASTM D4157-07 Wyz abrasion (heavy duty)		3-23709-3	27 Dec 2017	PDF

Pilling

Test	Condition	No.	Date	Download
BS EN ISO 12945-2		28511294	15 Feb 2021	PDF
ASTM D3511 Pilling		3-23709-2	18 Jan 2018	PDF

Colour fastness to light

Test	Condition	No.	Date	Download
BS EN ISO 105 B02 Method 2		144318726	03 Feb 2021	PDF
AATCC 16 Light fastness		3-24560-0	28 Feb 2018	PDF

Dry and wet rubbing/crocking

Test	Condition	No.	Date	Download
BS EN ISO 105-X12 Rubbing dry/wet		28511294	15 Feb 2021	PDF
AATCC 8 or 116 Dry/wet crocking		3-23709-1	18 Jan 2018	PDF

Rubbing with organic solvents

Test	Condition	No.	Date	Download
BS EN ISO 105-D02 Organic solvents		144318720b	22 Mar 2021	PDF

Colour Fastness to Perspiration

Test	Condition	No.	Date	Download
BS EN ISO 105-E04		28511294	15 Feb 2021	PDF

Colour fastness to water spotting

Test	Condition	No.	Date	Download
BS EN ISO 105-E16		28511310	05	PDF

Mar
2021

Seam slippage

Test	Condition	No.	Date	Download
BS EN ISO 13936-2		28511294	15 Feb 2021	PDF

Flammability

Test	Condition	No.	Date	Download
BS EN 1021 1&2 Cigarette and Match	35 kg/m3 CMHR foam	F21180/2	18 May 2021	PDF
BS EN 1021-1 Cigarette	20-22 kg/m3 non-fire retardant polyurethane foam	23/58122-11-1	27 Jan 2021	PDF
BS 7176 Medium hazard	35 kg/m3 CMHR foam	F21180/2	18 May 2021	PDF
BS 5852 Crib 5	35 kg/m3 CMHR foam	F21180/2	18 May 2021	PDF
DIN 4102 - B1		240042	26 Feb 2024	PDF
NF P 92-503/504/505 M1		CM-22-P-019	07 Mar 2022	PDF
Class Uno UNI 9175 Class 1 I EMME		240042	26 Feb 2024	PDF
ÖNORM A3800-B1-		240042	27	PDF

B3825-Q1 UK

Feb
2024

FAR/JAR 25.853 (a) (i) (ii)

240042

27 [PDF](#)
Feb
2024

CA TB 117-2013

2443090099e
002

20 [PDF](#)
Feb
2021

DIN EN 13501-1 B-s1,d0

Z-56.25-3573

09 [PDF](#)
Oct
2023

AM 18 - NF D 60-013-
(only for fabric)

PM - 19 - 010

17 [PDF](#)
Apr
2019

Wash stability

Test	Condition	No.	Date	Download
BS EN ISO 6330 6M 60 C PC Flat dry		28511294	15 Feb 2021	PDF

Resistance to Bleach Cleaning

Test	Condition	No.	Date	Download
Internal test according BIFMA HCF 8.1 and ACT Method 1	1:10 Sodium Hypochlorite 5,25- 6,25%		05 Oct 2020	PDF

VOC emission

Test	Condition	No.	Date	Download
Ansi/Bifma VOC test M7.1		392-2025- 00484401	09 Oct 2025	PDF

Material Safety Data Sheet

Test	Condition	No.	Date	Download
Material Safety Data Sheet			30 Sep 2021	PDF

Potential environmental impacts

Test	Condition	No.	Date	Download
Environmental Product Declaration (EPD)			18 Feb 2026	PDF

Care & Maintenance

Wash or dry cleaning P(W).

Go Couture is made of Trevira CS which is a polyester material suited for environments with special requirements for cleaning.

Can be wiped with Virkon S, Actichlor Plus, Prime Source ren-93 or Ethanol (70-85%).

Always follow the manufacturer's instructions and finish by wiping with a damp cloth.

Click here for guidance relating to disinfection. [Link to Stain Guide...](#)



40°C shrinkage max 1.5%



60°C shrinkage max 2.5%



74°C shrinkage max 3.5%