


HARLEQUIN

COLOUR 8714-63053

Please be aware that the colour shades can appear different from the real fabric colours. We advise you to request actual fabric samples before ordering.

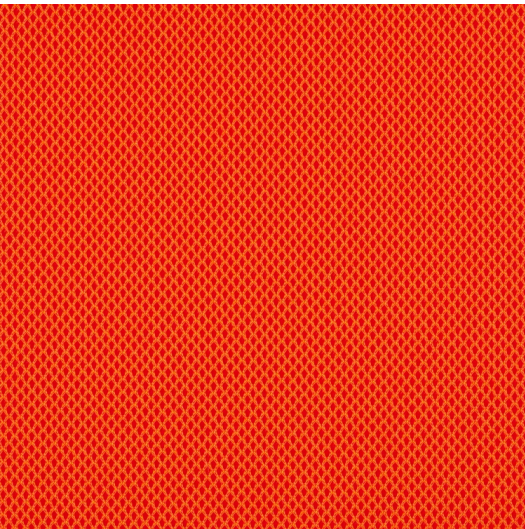

COLOUR SCALE

Design no. 8714 Harlequin (160 cm/63") is available in 17 colours



Harlequin is a self-supporting 3D net textile with an airy three-dimensional structure. With its characteristic Harlequin pattern, the design evokes memories of classical upholstery fabric. Harlequin is ideal whether used as a mesh fabric or the weight-bearing surface fabric for furniture or backrests, where its stretchability and three-dimensional structure ensure good stability and comfort. Harlequin is both streamlined and elegant when stretched on partition walls, and stable and comfortable when used for complete furniture upholstery. An elegant fabric with many uses.

100% recyclable polyester

Designed by: Inger Mosholt Nielsen
Colours designed by: Cenk Kivrikoglu



PRODUCT SPECIFICATIONS

CHARACTERISTICS

Design no.

8714 — Harlequin

Application

Upholstery

Composition

77% Polyester, 23% Post-consumer recycled polyester

Weight

510 g/lm — 16.45 oz/lin.yd

Width

160 cm — 63 inches

PERFORMANCE

Abrasion

100,000 — rubs martindale (EN ISO 12947-2)

100,000 — double rubs wyzenbeek (ASTM D4157)
(heavy duty upholstery)

Pilling

5 — scale 1-5, max. 5 (EN ISO 12945-2)

Light fastness

5-7 — scale 1-8, max. 8 (EN ISO 105-B02)

Rubbing fastness dry/wet

4-5/4-5 — scale 1-5, max. 5 (EN ISO 105x12)

Flammability

[BS EN 1021-1 Cigarette](#)

[BS EN 1021-2 Match](#)

[CA TB 117-2013](#)

Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemicals.

US ACT pass

 [AATCC 8 or 116 Dry/wet crocking](#)

 [ASTM D4157-07 Wyz abrasion \(heavy duty\) 100k](#)

 [ASTM D3511 Pilling](#)

 [AATCC 16 Light fastness](#)

 [CA TB 117-2013](#)

Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

CERTIFICATES

ABRASION RESISTANCE

Test	Condition	No.	Date	Download
BS EN ISO 12947-2/14465	In accordance with EN 14465	G20094/1A	23 Sep 2020	PDF

ASTM D4157-07 Wyz abrasion (heavy duty) 100k	2021AN0709	16 Apr 2021	PDF
---	------------	-------------	---------------------

PILLING

Test	Condition	No.	Date	Download
BS EN ISO 12945-2		93334-03	28 Jan 2018	PDF
ASTM D3511 Pilling		21-006181	04 Jan 2022	PDF

COLOUR FASTNESS TO LIGHT

Test	Condition	No.	Date	Download
BS EN ISO 105 B02 Method 2		69933	23 Jun 2015	PDF
BS EN ISO 105 B02 Method 2		G20094/1A	23 Sep 2020	PDF
AATCC 16 Light fastness		2022AN0026	19 Jan 2022	PDF

DRY AND WET RUBBING/CROCKING

Test	Condition	No.	Date	Download
BS EN ISO 105-X12 Rubbing dry/wet		69933	23 Jun 2015	PDF
BS EN ISO 105-X12 Rubbing dry/wet		G20094/1A	23 Sep 2020	PDF
AATCC 8 or 116 Dry/wet crocking		2022AN0026	19 Jan 2022	PDF

FLAMMABILITY

Test	Condition	No.	Date	Download
BS EN 1021-1 Cigarette	20-22 kg/m3 non-fire retardant polyurethane foam	23/63236J/06/25	27 Jun 2025	PDF
BS EN 1021-2 Match	35 kg/m3 CMHR foam	23/63236J/06/25	27 Jun 2025	PDF
CA TB 117-2013		25-001500	04 Jun 2025	PDF

WASH STABILITY

Test	Condition	No.	Date	Download
BS EN ISO 6330 4M 40 C PC Flat dry		2020AN1551	25 Sep 2020	PDF
BS EN ISO 6330 6M 60 C PC Flat dry		2020AN1551	25 Sep 2020	PDF

MATERIAL SAFETY DATA SHEET

Test	Condition	No.	Date	Download
Material Safety Data Sheet			30 Sep 2021	PDF

CARE & MAINTENANCE

Wash or dry cleaning P(W).

Harlequin is made of polyester which is a material suited for environments with special requirements for cleaning.

Click here for guidance relating to disinfection. [Link to Stain Guide...](#)



40°C shrinkage max 4.0%



60°C shrinkage max 5.0%