


MEDLEY

COLOUR 8613-66008

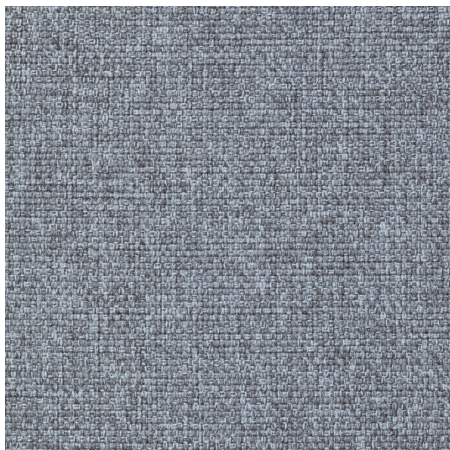

Please be aware that the colour shades can appear different from the real fabric colours. We advise you to request actual fabric samples before ordering.

COLOUR SCALE

Design no. 8613 Medley (140 cm/55") is available in 37 colours



Medley is woven in 100% polyester melange yarn with a simple, geometric structure. The tight texture and changing structure of the yarn gives the fabric an intense colour depth and a lively surface in multiple shades. Medley has been specially developed for upholstery of furniture and screens, and it addresses both the home and contract markets.

100% recyclable polyester
Meets Möbelfakta requirements

Design and colours are developed by Mette Krebs Petersen



PRODUCT SPECIFICATIONS

CHARACTERISTICS

Design no.

8613 — Medley

Application

Upholstery

PERFORMANCE

Abrasion

75,000 — rubs martindale (EN ISO 12947-2)

100,000 — double rubs wyzenbeek (ASTM D4157) (heavy duty upholstery)

Panel

Composition

100% Polyester

Weight

510 g/lm — 16.45 oz/lin.yd

Width

140 cm — 55 inches

Pilling

4 — scale 1-5, max. 5 (EN ISO 12945-2)

Light fastness

5-7 — scale 1-8, max. 8 (EN ISO 105-B02)

Rubbing fastness dry/wet

4-5/4-5 — scale 1-5, max. 5 (EN ISO 105x12)

Flammability

BS EN 1021 1&2 Cigarette and Match

BS EN 1021-1 Cigarette

BS 476 Part 7 class 2

Class Uno UNI 8457 - UNI 9174

ÖNORM A3800-B2-B3825-Q1 UK

CA TB 117-2013

ASTM E 84 Class 1(Unadhered)

Will also pass other flammability standards.
Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemicals.

US ACT pass

 AATCC 8 or 116 Dry/wet crocking

 AATCC 16 Light fastness

 ASTM D3511 Pilling

 ASTM D4157-07 Wyz abrasion (heavy duty) 100k

 CA TB 117-2013

 ASTM E 84 Class 1(Unadhered)

Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

CERTIFICATES

ACOUSTIC TEST AIR FLOW RESISTANCE

Test	Condition	No.	Date	Download
EN 29053 & ISO 9053-1 (airflow resistance)		M104146/23	09 Jun	PDF

ACOUSTIC TEST SOUND ABSORPTION

Test	Condition	No.	Date	Download
ISO 354 & ISO 11654 (sound absorption)		M104146/22	09 Jun 2015	PDF

ABRASION RESISTANCE

Test	Condition	No.	Date	Download
BS EN ISO 12947-2/14465	In accordance with EN 14465	28514447	12 Mar 2024	PDF
ASTM D4157-07 Wyz abrasion (heavy duty) 100k		2021AN0710	19 Apr 2021	PDF

PILLING

Test	Condition	No.	Date	Download
BS EN ISO 12945-2		28514447	12 Mar 2024	PDF
ASTM D3511 Pilling		21-006161	04 Jan 2022	PDF

COLOUR FASTNESS TO LIGHT

Test	Condition	No.	Date	Download
BS EN ISO 105 B02 Method 2		71490-01	30 Sep 2015	PDF
BS EN ISO 105 B02 Method 2		2023AN2800	22 Dec 2023	PDF
AATCC 16 Light fastness		2025AN1757	26 Jun 2025	PDF

DRY AND WET RUBBING/CROCKING

Test	Condition	No.	Date	Download
BS EN ISO 105-X12 Rubbing dry/wet		71490	31 Aug 2015	PDF
BS EN ISO 105-X12 Rubbing dry/wet		2023AN2800	22 Dec 2023	PDF
AATCC 8 or 116 Dry/wet crocking		2025AN1757	26 Jun 2025	PDF

FLAMMABILITY

Test	Condition	No.	Date	Download
BS EN 1021 1&2 Cigarette and Match	35 kg/m3 CMHR foam	23/59121F/11/21	04 Jan 2022	PDF
BS EN 1021-1 Cigarette	20-22 kg/m3 non-fire retardant polyurethane foam	23/58122-14	27 Jan 2021	PDF
BS 476 Part 7 class 2		80459	25 Nov 2016	PDF
Class Uno UNI 8457 - UNI 9174		283529 / 1	16 Jan 2020	PDF
ÖNORM A3800-B2-B3825-Q1 UK		73028	24 Feb 2014	PDF
CA TB 117-2013		25-001502	04 Jun 2025	PDF
ASTM E 84 Class 1(Unadhered)	Unadhered	2-95228-0	04 Feb 2013	PDF

WASH STABILITY

Test	Condition	No.	Date	Download
BS EN ISO 6330 6M 60 C PC Flat dry		28512165	28 Jan 2022	PDF

RESISTANCE TO BLEACH CLEANING

Test	Condition	No.	Date	Download
Internal test according BIFMA HCF 8.1 and ACT Method 1	1:10 Sodium Hypochlorite 5,25-6,25%		05 Oct 2020	PDF

MATERIAL SAFETY DATA SHEET

Test	Condition	No.	Date	Download
Material Safety Data Sheet			30 Sep 2021	PDF

CARE & MAINTENANCE

Wash or dry cleaning P(W).

Medley is made of polyester which is a material suited for environments with special requirements for cleaning.

Click here for guidance relating to disinfection. [Link to Stain Guide...](#)



60°C shrinkage max 1.0%



74°C shrinkage max 3.0%