


RUNNER


COLOUR 8705-64159

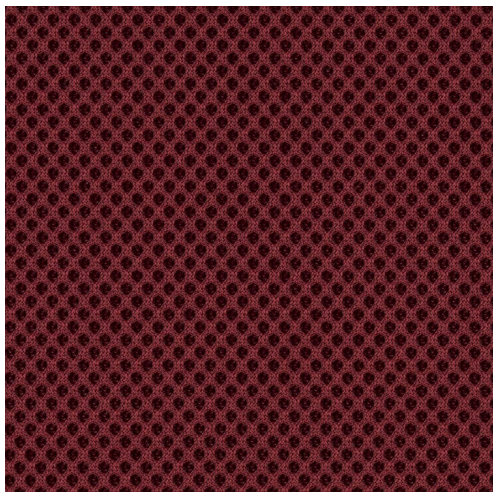

Please be aware that the colour shades can appear different from the real fabric colours. We advise you to request actual fabric samples before ordering.

COLOUR SCALE

Design no. 8705 Runner (160 cm/63") is available in 25 colours

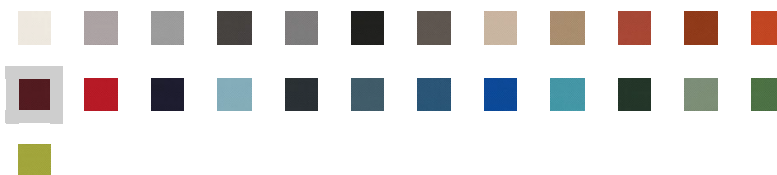

Discontinued colours



Runner is the preferred mesh choice for modern office seating. Breathable and flexible; Designed for chair backs and mesh applications, Runner ensures optimal airflow and ergonomic support. Engineered to maintain its shape and appearance over time, ensuring long-lasting quality. Available in 25 popular colours, it effortlessly blends contemporary elegance with versatile functionality. Runner brings balance and harmony to any fabric combination; whether its wool or polyester.

100% recyclable polyester

Meets Möbelfakta requirements

Designed by: Inger Mosholt Nielsen

Colours designed by: Cenk Kivrikoglu



PRODUCT SPECIFICATIONS

CHARACTERISTICS

Design no.

8705 — Runner

Application

Upholstery

Composition

80% Polyester, 20% Post-consumer recycled polyester

Weight

510 g/lm — 16.45 oz/lin.yd

Width

160 cm — 63 inches

PERFORMANCE

Abrasion

70,000 — rubs martindale (EN ISO 12947-2)

100,000 — double rubs wyzenbeek (ASTM D4157)
(heavy duty upholstery)

Pilling

5 — scale 1-5, max. 5 (EN ISO 12945-2)

Light fastness

5-7 — scale 1-8, max. 8 (EN ISO 105-B02)

Rubbing fastness dry/wet

4-5/4-5 — scale 1-5, max. 5 (EN ISO 105x12)

Flammability

CA TB 117-2013

BS EN 1021-1 Cigarette

BS EN 1021 1&2 Cigarette and Match

Will also pass other flammability standards.

Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemicals.

US ACT pass

 ASTM D4157-07 Wyz abrasion (heavy duty) 100k

 ASTM D3511 Pilling

 AATCC 16 Light fastness

 AATCC 8 or 116 Dry/wet crocking

 CA TB 117-2013

Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

CERTIFICATES

ACOUSTIC TEST AIR FLOW RESISTANCE

Test	Condition	No.	Date	Download
EN 29053 & ISO 9053-1 (airflow		M104146/20	09 Feb	PDF

resistance)

2015

ACOUSTIC TEST SOUND ABSORPTION

Test	Condition	No.	Date	Download
ISO 354 & ISO 11654 (sound absorption)		103008	25 Jun 2009	PDF

ABRASION RESISTANCE

Test	Condition	No.	Date	Download
BS EN ISO 12947-2/14465	In accordance with EN 14465	893562-12A	10 Feb 2020	PDF
ASTM D4157-07 Wyz abrasion (heavy duty) 100k		2021AN0711	15 Apr 2021	PDF

PILLING

Test	Condition	No.	Date	Download
BS EN ISO 12945-2		A 893562-12	21 Jan 2020	PDF
ASTM D3511 Pilling		25-001509	05 Jun 2025	PDF

COLOUR FASTNESS TO LIGHT

Test	Condition	No.	Date	Download
BS EN ISO 105 B02 Method 2		67772	14 Jan 2015	PDF
BS EN ISO 105 B02 Method 2		2024AN1687	26 Jul 2024	PDF
AATCC 16 Light fastness		2024AN1687	26 Jul 2024	PDF

DRY AND WET RUBBING/CROCKING

Test	Condition	No.	Date	Download
BS EN ISO 105-X12 Rubbing dry/wet		2024AN2505	02 Oct 2024	PDF
BS EN ISO 105-X12 Rubbing dry/wet		A 893562-12	21 Jan 2020	PDF
AATCC 8 or 116 Dry/wet crocking		2024AN2505	02 Oct 2024	PDF

COLOUR FASTNESS TO DRY CLEANING

Test	Condition	No.	Date	Download
BS EN ISO 105-D01		101433	30 Aug 2018	PDF

COLOUR FASTNESS TO WATER SPOTTING

Test	Condition	No.	Date	Download
BS EN ISO 105-E16		28511296	05 Mar 2021	PDF

FLAMMABILITY

Test	Condition	No.	Date	Download
CA TB 117-2013		25-001509	05 Jun 2025	PDF
BS EN 1021-1 Cigarette	20-22 kg/m3 non-fire retardant polyurethane foam	F20097/1	05 Mar 2020	PDF
BS EN 1021 1&2 Cigarette and Match	35 kg/m3 CMHR foam	20AN0532	11 Feb 2020	PDF

MATERIAL SAFETY DATA SHEET

Test	Condition	No.	Date	Download
Material Safety Data Sheet			30 Sep 2021	PDF

CARE & MAINTENANCE

Wash or dry cleaning P(W).

Runner is made of polyester which is a material suited for environments with special requirements for cleaning.

Click here for guidance relating to disinfection. [Link to Stain Guide...](#)

