


STRING

COLOUR 8708-60119

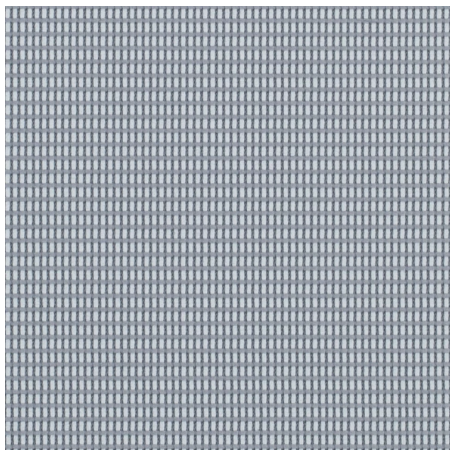

Please be aware that the colour shades can appear different from the real fabric colours. We advise you to request actual fabric samples before ordering.

COLOUR SCALE

Design no. 8708 String (150 cm/59") is available in 5 colours



String is a transparent, almost invisible webbed textile with exceptional strength and load-bearing capacity. The webbing's strength allows String to be used in a self-supporting context in furniture backs. This can be as a single-layer transparent membrane, a multi-layer upholstery in combination with other textiles, or a technical load-bearing web which permits light full upholstery or cushion solutions.

100% recyclable polyester

Design and colours are developed by Inger Mosholt Nielsen



STANDARD
100
1076-182
DTI
www.oeko-tex.com



PRODUCT SPECIFICATIONS

CHARACTERISTICS

Design no.
8708 — String

Application
Upholstery

Composition
100% Polyester

Weight
330 g/lm — 10.64 oz/lin.yd

Width
150 cm — 59 inches

PERFORMANCE

Abrasion
70,000 — rubs martindale (EN ISO 12947-2)
100,000 — double rubs wyzenbeek (ASTM D4157) (heavy duty upholstery)

Pilling
4-5 — scale 1-5, max. 5 (EN ISO 12945-2)

Light fastness
5-7 — scale 1-8, max. 8 (EN ISO 105-B02)

Rubbing fastness dry/wet
4-5/4-5 — scale 1-5, max. 5 (EN ISO 105x12)

Flammability
[BS EN 1021 1&2 Cigarette and Match](#)
[CA TB 117-2013](#)

Will also pass other flammability standards.
Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemicals.

- US ACT pass**
-  [CA TB 117-2013](#)
 -  [ASTM D4157-07 Wyz abrasion \(heavy duty\) 100k](#)
 -  [ASTM D3511 Pilling](#)
 -  [AATCC 8 or 116 Dry/wet crocking](#)
 -  [AATCC 16 Light fastness](#)

Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

CERTIFICATES

ABRASION RESISTANCE

Test	Condition	No.	Date	Download
BS EN ISO 12947-2/14465	In accordance with EN 14465	A 893562-16A	12 Feb 2020	PDF

ASTM D4157-07 Wyz abrasion (heavy duty) 100k	2021AN0738	06 May 2021	PDF
--	------------	-------------	---------------------

PILLING

Test	Condition	No.	Date	Download
BS EN ISO 12945-2		28512160	28 Jan 2022	PDF
ASTM D3511 Pilling		21-006192	04 Jan 2022	PDF

COLOUR FASTNESS TO LIGHT

Test	Condition	No.	Date	Download
BS EN ISO 105 B02 Method 2		144353506	25 Feb 2022	PDF
AATCC 16 Light fastness		2022AN0285	22 Feb 2022	PDF

DRY AND WET RUBBING/CROCKING

Test	Condition	No.	Date	Download
BS EN ISO 105-X12 Rubbing dry/wet		2022AN0285	22 Feb 2022	PDF
AATCC 8 or 116 Dry/wet crocking		2022AN0285	22 Feb 2022	PDF

FLAMMABILITY

Test	Condition	No.	Date	Download
BS EN 1021 1&2 Cigarette and Match	35 kg/m3 CMHR foam	23/58122-22	27 Jan 2021	PDF
CA TB 117-2013		25-001501	04 Jun 2025	PDF

WASH STABILITY

Test	Condition	No.	Date	Download
BS EN ISO 6330 6M 60 C PC Flat dry		186431	24 Jan 2017	PDF
BS EN ISO 6330 4M 40 C PC Flat dry		186431	24 Jan 2017	PDF

MATERIAL SAFETY DATA SHEET

Test	Condition	No.	Date	Download
Material Safety Data Sheet			30 Sep 2021	PDF

CARE & MAINTENANCE

Wash or dry cleaning P(W).

String is made of polyester which is a material suited for environments with special requirements for cleaning.

Click here for guidance relating to disinfection. [Link to Stain Guide...](#)



40°C shrinkage max 1.0%



60°C shrinkage max 1.5%