


# SWING


## COLOUR 2466-51902

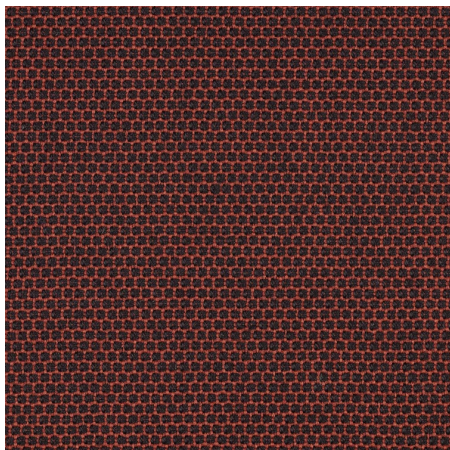

Please be aware that the colour shades can appear different from the real fabric colours. We advise you to request actual fabric samples before ordering.

## COLOUR SCALE

Design no. 2466 Swing (140 cm/55") is available in 29 colours

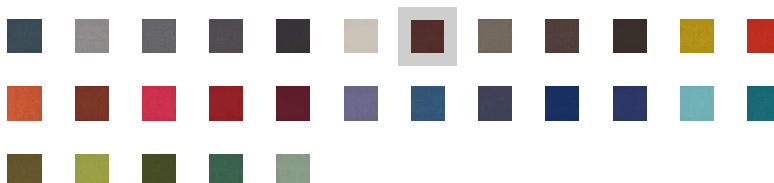

Swing is inspired by the world of handicrafts, where an artist shapes and creates a work with tiny irregularities and a unique identity. In the same way Swing with its combination of New Zealand wool and recycled polyester and its geometric structure creates a wonderful, living impression. An impression in line with today's trends, where uniqueness is the goal, and where small imperfections are precisely what makes the impression perfect.

Meets Möbelfakta requirements

Design and colours are developed by Mette Krebs Petersen



## PRODUCT SPECIFICATIONS

CHARACTERISTICS

**Design no.**  
2466 — Swing

**Application**  
Upholstery

**Composition**  
54% New Zealand wool, 44% Post-consumer recycled polyester, 2% Polyamide

**Weight**  
430 g/lm — 13.87 oz/lin.yd

**Width**  
140 cm — 55 inches

PERFORMANCE

**Abrasion**  
100,000 — rubs martindale (EN ISO 12947-2)  
100,000 — rubs martindale (ASTM D4966)  
(heavy duty upholstery)

**Pilling**  
4-5 — scale 1-5, max. 5 (EN ISO 12945-2)

**Light fastness**  
5-7 — scale 1-8, max. 8 (EN ISO 105-B02)

**Rubbing fastness dry/wet**  
4-5/4-5 — scale 1-5, max. 5 (EN ISO 105x12)

**Flammability**  
[BS EN 1021 1&2 Cigarette and Match](#)  
[BS EN 1021-1 Cigarette](#)  
[ÖNORM A3800-1 Smoke emission](#)  
[CA TB 117-2013](#)

Will also pass other flammability standards.  
Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemicals.

- US ACT pass**
-  [CA TB 117-2013](#)
  -  [ASTM D4966 Martindale \(heavy duty.\)](#)
  -  [ASTM D4970 Pilling](#)
  -  [AATCC 16 Light fastness](#)
  -  [AATCC 8 or 116 Dry/wet crocking](#)

Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

CERTIFICATES

ABRASION RESISTANCE

| Test | Condition | No. | Date | Download |
|------|-----------|-----|------|----------|
|------|-----------|-----|------|----------|

|                                    |                             |             |             |                     |
|------------------------------------|-----------------------------|-------------|-------------|---------------------|
| BS EN ISO 12947-2/14465            | In accordance with EN 14465 | A 893562-17 | 21 Jan 2020 | <a href="#">PDF</a> |
| ASTM D4966 Martindale (heavy duty) |                             | 3-14275-0   | 09 Aug 2016 | <a href="#">PDF</a> |

## PILLING

| Test               | Condition | No.       | Date        | Download            |
|--------------------|-----------|-----------|-------------|---------------------|
| BS EN ISO 12945-2  |           | 28510709  | 18 Feb 2020 | <a href="#">PDF</a> |
| ASTM D4970 Pilling |           | 21-006184 | 10 Jan 2022 | <a href="#">PDF</a> |

## COLOUR FASTNESS TO LIGHT

| Test                       | Condition | No.         | Date        | Download            |
|----------------------------|-----------|-------------|-------------|---------------------|
| BS EN ISO 105 B02 Method 2 |           | A 893562-17 | 21 Jan 2020 | <a href="#">PDF</a> |
| AATCC 16 Light fastness    |           | 3-35682-0   | 07 Jan 2020 | <a href="#">PDF</a> |

## DRY AND WET RUBBING/CROCKING

| Test                              | Condition | No.         | Date        | Download            |
|-----------------------------------|-----------|-------------|-------------|---------------------|
| BS EN ISO 105-X12 Rubbing dry/wet |           | A 893562-17 | 21 Jan 2020 | <a href="#">PDF</a> |
| AATCC 8 or 116 Dry/wet crocking   |           | 3-35682-1   | 07 Jan 2020 | <a href="#">PDF</a> |

## FLAMMABILITY

| Test                               | Condition                                        | No.               | Date        | Download            |
|------------------------------------|--------------------------------------------------|-------------------|-------------|---------------------|
| BS EN 1021 1&2 Cigarette and Match | 35 kg/m3 CMHR foam                               | 113786-02         | 06 Jan 2020 | <a href="#">PDF</a> |
| BS EN 1021-1 Cigarette             | 20-22 kg/m3 non-fire retardant polyurethane foam | 23/59121L/11/21   | 04 Jan 2022 | <a href="#">PDF</a> |
| ÖNORM A3800-1 Smoke emission       |                                                  | VN736<br>163584.1 | 14 Jan 2020 | <a href="#">PDF</a> |
| CA TB 117-2013                     |                                                  | 3-35682-2         | 07 Jan 2020 | <a href="#">PDF</a> |

## MATERIAL SAFETY DATA SHEET

| Test                       | Condition | No. | Date        | Download            |
|----------------------------|-----------|-----|-------------|---------------------|
| Material Safety Data Sheet |           |     | 30 Sep 2021 | <a href="#">PDF</a> |

## CARE & MAINTENANCE

Dry cleaning P(S)

