


TEMPT


COLOUR 8913-67045

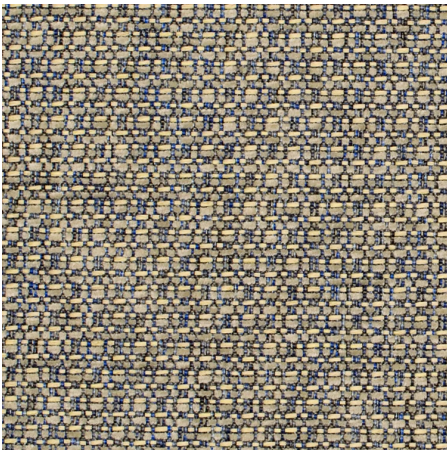

Please be aware that the colour shades can appear different from the real fabric colours. We advise you to request actual fabric samples before ordering.

COLOUR SCALE

Design no. 8913 Tempt (140 cm/55") is available in 19 colours

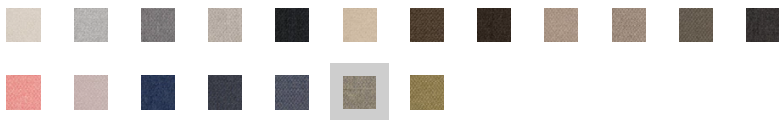

Tempt is a delicate textile woven in solid, durable polyester yarns which, with its subtle structure and softness, is reminiscent of hand-woven cotton. Tempt radiates elegance with its three different yarns, undulating and weaving into each other and creating a textile with a vibrant mottled surface.

100% recyclable polyester
Meets Möbelfakta requirements

Design and colours are developed by Cenk Kivrikoglu



PRODUCT SPECIFICATIONS

CHARACTERISTICS

- Design no.

8913 — Tempt
- Application

Upholstery
- Composition

100% Polyester
- Weight

504 g/lm — 16.26 oz/lin.yd
- Width

140 cm — 55 inches

PERFORMANCE

- Abrasion

90,000 — rubs martindale (EN ISO 12947-2)

100,000 — double rubs wyzenbeek (ASTM D4157) (heavy duty upholstery)
- Pilling

4-5 — scale 1-5, max. 5 (EN ISO 12945-2)
- Light fastness

5-8 — scale 1-8, max. 8 (EN ISO 105-B02)
- Rubbing fastness dry/wet

4-5/4-5 — scale 1-5, max. 5 (EN ISO 105x12)
- Flammability

[BS EN 1021-1 Cigarette](#)

[BS EN 1021 1&2 Cigarette and Match](#)

[CA TB 117-2013](#)

Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemicals.
- US ACT pass



[ASTM D4157-07 Wyz abrasion \(heavy duty\)](#)
[100k](#)



[ASTM D3511 Pilling](#)



[AATCC 16 Light fastness](#)



[AATCC 8 or 116 Dry/wet crocking](#)



[CA TB 117-2013](#)

Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

CERTIFICATES

ABRASION RESISTANCE

Test	Condition	No.	Date	Download
BS EN ISO 12947-2/14465	In accordance with EN 14465	108967	12 Apr	PDF

2019

ASTM D4157-07 Wyz abrasion
(heavy duty) 100k

2021AN0739 14 [PDF](#)
May
2021

PILLING

Test	Condition	No.	Date	Download
BS EN ISO 12945-2		103621A	13 Feb 2019	PDF
ASTM D3511 Pilling		3-29654-1	27 Nov 2018	PDF

COLOUR FASTNESS TO LIGHT

Test	Condition	No.	Date	Download
BS EN ISO 105 B02 Method 2		65102	20 Jun 2014	PDF
BS EN ISO 105 B02 Method 2		103621-01	26 Feb 2019	PDF
AATCC 16 Light fastness		3-35680-0	07 Jan 2020	PDF

DRY AND WET RUBBING/CROCKING

Test	Condition	No.	Date	Download
BS EN ISO 105-X12 Rubbing dry/wet		103621A	13 Feb 2019	PDF
AATCC 8 or 116 Dry/wet crocking		3-35680-1	07 Jan 2020	PDF

SEAM SLIPPAGE

Test	Condition	No.	Date	Download
BS EN ISO 13936-2		103621A	13 Feb 2019	PDF
ASTM D4034 Yarn slippage at a sewn seam		3-29299-1	08 Nov 2018	PDF

RUBBING WITH ORGANIC SOLVENTS

Test	Condition	No.	Date	Download
------	-----------	-----	------	----------

BS EN ISO 105-D02 Organic solvents

103621A

13 Feb 2019 [PDF](#)

COLOUR FASTNESS TO PERSPIRATION

Test	Condition	No.	Date	Download
BS EN ISO 105-E04		103621A	13 Feb 2019	PDF

COLOUR FASTNESS TO WATER SPOTTING

Test	Condition	No.	Date	Download
BS EN ISO 105-E16		103621A	13 Feb 2019	PDF

FLAMMABILITY

Test	Condition	No.	Date	Download
BS EN 1021-1 Cigarette	20-22 kg/m3 non-fire retardant polyurethane foam	23/58122-23	27 Jan 2021	PDF
BS EN 1021 1&2 Cigarette and Match	35 kg/m3 CMHR foam	103644-01	07 Dec 2018	PDF
CA TB 117-2013		3-29654-0	27 Nov 2018	PDF

BREAKING FORCE

Test	Condition	No.	Date	Download
ASTM D5034 Breaking force		3-29299-0	07 Nov 2018	PDF

MATERIAL SAFETY DATA SHEET

Test	Condition	No.	Date	Download
Material Safety Data Sheet			30 Sep 2021	PDF

CARE & MAINTENANCE

Wash or dry cleaning P(W).

Tempt is made of polyester which is a material suited for environments with special requirements for cleaning.

Click here for guidance relating to disinfection. [Link to Stain Guide...](#)



40°C shrinkage max 2.0%



60°C shrinkage max 2.0%
