


TWIST MELANGE


COLOUR 2446-67004

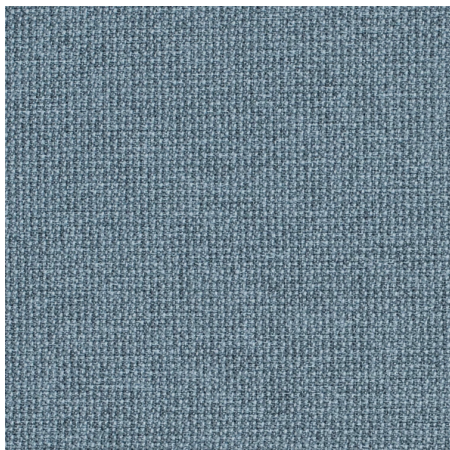

Please be aware that the colour shades can appear different from the real fabric colours. We advise you to request actual fabric samples before ordering.

COLOUR SCALE

Design no. 2446/2447 Twist Melange (170 cm/67") is available in 17 colours



Twist Melange is an elegant screen textile woven in the non-flammable yarn Trevira CS. It is highly suitable for use in areas where requirements regarding fire and safety are extremely high. The fabric was developed as screen wall partner to Step and Step Melange. Twist Melange is woven with the same characteristic beautiful and straightforward structure, but with a lower weight and greater width.

Meets Möbelfakta requirements

Design and colours are developed by Mette Krebs Petersen



PRODUCT SPECIFICATIONS

CHARACTERISTICS

Design no.
2446 / 2447 — Twist Melange

Application
Panel
Screen

Composition
100% Trevira CS

Weight
370 g/lm — 11.93 oz/lin.yd

Width
170 cm — 67 inches

ENVIRONMENT

Environment, health, and safety
Meets Möbelfakta requirements

VOC emission
[Ansi/Bifma VOC test M7.1](#)

Life Cycle Assessment (LCA)
[LCA Summary Report](#)

PERFORMANCE

Light fastness
5-7 — scale 1-8, max. 8 (EN ISO 105-B02)

Rubbing fastness dry/wet
4-5/4-5 — scale 1-5, max. 5 (EN ISO 105x12)

Flammability
[ASTM E 84 Class 1\(Unadhered\)](#)
[DIN 4102 – B1](#)
[NF P 92-503/504/505 M1](#)
[BS 476 Part 7 class 1](#)
[Class Uno UNI 9175 Class 1 I EMME](#)
[Class Uno UNI 9177 – Class 1 I EMME](#)
[Class Uno UNI 8457 – UNI 9174](#)
[DIN EN 13501-1 B-s1,d0](#)

Will also pass other flammability standards.
Flame retardant performance is dependent upon the foam used.

US ACT pass
 [AATCC 16 Light fastness](#)
 [AATCC 8 or 116 Dry/wet crocking](#)
 [ASTM E 84 Class 1\(Unadhered\)](#)

CERTIFICATES

ACOUSTIC TEST AIR FLOW RESISTANCE

Test	Condition	No.	Date	Download
EN 29053 & ISO 9053-1 (airflow resistance)		M104146/14	04 Feb 2015	PDF

ACOUSTIC TEST SOUND ABSORPTION

Test	Condition	No.	Date	Download
ISO 354 & ISO 11654 (sound absorption)		M104146/13	06 Feb 2015	PDF

COLOUR FASTNESS TO LIGHT

Test	Condition	No.	Date	Download
BS EN ISO 105 B02 Method 2		56674-01	25 Mar 2013	PDF
BS EN ISO 105 B02 Method 2		93343-01	22 Jan 2018	PDF
AATCC 16 Light fastness		2021AN2686	27 Jan 2022	PDF

DRY AND WET RUBBING/CROCKING

Test	Condition	No.	Date	Download
BS EN ISO 105-X12 Rubbing dry/wet		93343-01	22 Jan 2018	PDF
BS EN ISO 105-X12 Rubbing dry/wet		56674-02	25 Mar 2013	PDF
AATCC 8 or 116 Dry/wet crocking		2021AN2686	27 Jan 2022	PDF

SEAM SLIPPAGE

Test	Condition	No.	Date	Download
BS EN ISO 13936-2		106233	14 Feb 2019	PDF

FLAMMABILITY

Test	Condition	No.	Date	Download
ASTM E 84 Class 1(Unadhered)	Unadhered	3-29655-0	27 Nov 2018	PDF
DIN 4102 - B1		240045	27 Feb 2024	PDF
NF P 92-503/504/505 M1		CM-23-P-043	10 Oct 2023	PDF
BS 476 Part 7 class 1		93343	22 Jan 2018	PDF
Class Uno UNI 9175 Class 1 I EMME		240045	27 Feb 2024	PDF
Class Uno UNI 9177 - Class 1 I EMME		200716	20 Jul 2016	PDF
Class Uno UNI 8457 - UNI 9174		240045	27 Feb 2024	PDF

DIN EN 13501-1 B-s1,d0

Z-56.25-
3573

09 Oct
2023 [PDF](#)

WASH STABILITY

Test	Condition	No.	Date	Download
BS EN ISO 6330 6M 60 C PC Flat dry		56677	21 Feb 2013	PDF

VOC EMISSION

Test	Condition	No.	Date	Download
Ansi/Bifma VOC test M7.1		961098C	29 Jan 2021	PDF

RESISTANCE TO BLEACH CLEANING

Test	Condition	No.	Date	Download
Internal test according BIFMA HCF 8.1 and ACT Method 1	1:10 Sodium Hypochlorite 5,25-6,25%		05 Oct 2020	PDF

MATERIAL SAFETY DATA SHEET

Test	Condition	No.	Date	Download
Material Safety Data Sheet			30 Sep 2021	PDF

LIFE CYCLE ASSESSMENT (LCA)

Test	Condition	No.	Date	Download
LCA Summary Report			14 Nov 2024	PDF

CARE & MAINTENANCE

Wiping down with water.

Twist Melange is made of Trevira CS which is a polyester material suited for environments with special requirements for cleaning.

Click here for guidance relating to disinfection. [Link to Stain Guide...](#)