

SOUL


COLOUR 8802-61198



Please be aware that the colour shades can appear different from the real fabric colours. We advise you to request actual fabric samples before ordering.

COLOUR SCALE

Design no. 8802 Soul (170 cm/67") is available in 37 colours

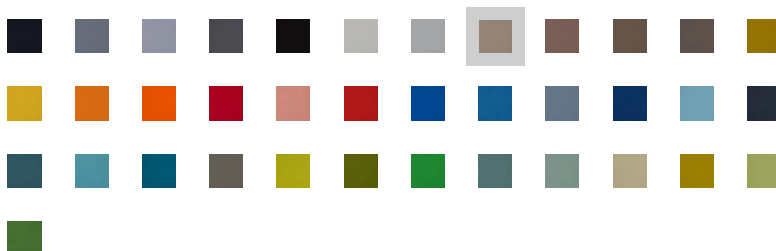

Soul is an exclusive and timeless wool felt fabric. With its thickness, density and natural elasticity it offers a structural quality, which makes it highly suitable for vertical surfaces, screens and panels. Mix and match the entire range of colours with Soul Melange's complimentary colourways for maximum freedom of design.

100% recyclable wool
Meets Möbelfakta requirements

Designed by: Inger Mosholt Nielsen
Colours designed by: Gabriel Design Team



PRODUCT SPECIFICATIONS

CHARACTERISTICS

Design no.
8802 — Soul

Application
Panel
Screen

Composition
100% Wool

Weight
330 g/lm — 10.64 oz/lin.yd

Width
170 cm — 67 inches

PERFORMANCE

Light fastness
5-7 — scale 1-8, max. 8 (EN ISO 105-B02)

Rubbing fastness dry/wet
4/4-5 — scale 1-5, max. 5 (EN ISO 105x12)

Flammability
BS 476 Part 7 class 1
ÖNORM A3800-B1-B3825-Q1 UK
ASTM E 84 Class 1(Adhered)
ASTM E 84 Class 1(Unadhered)

Will also pass other flammability standards.
Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemicals.

US ACT pass
 ASTM E 84 Class 1(Adhered)
 ASTM E 84 Class 1(Unadhered)

CERTIFICATES

ACOUSTIC TEST AIR FLOW RESISTANCE

Test	Condition	No.	Date	Download
EN 29053 & ISO 9053-1 (airflow resistance)		M104146/10	09 Feb 2015	PDF

ACOUSTIC TEST SOUND ABSORPTION

Test	Condition	No.	Date	Download
ISO 354 & ISO 11654 (sound absorption)		M104146/09	05 Feb 2015	PDF

COLOUR FASTNESS TO LIGHT

Test	Condition	No.	Date	Download
BS EN ISO 105 B02 Method 2		94673-01	02 Mar 2018	PDF

DRY AND WET RUBBING/CROCKING

Test	Condition	No.	Date	Download
------	-----------	-----	------	----------

BS EN ISO 105-X12 Rubbing dry/wet

90021-01

27 Sep 2017

[PDF](#)

FLAMMABILITY

Test	Condition	No.	Date	Download
BS 476 Part 7 class 1		93340	22 Jan 2018	PDF
ÖNORM A3800-B1-B3825-Q1 UK		75988	23 Mar 2015	PDF
ASTM E 84 Class 1(Adhered)	Adhered	24-002138	01 Oct 2024	PDF
ASTM E 84 Class 1(Unadhered)	Unadhered	22-003488	09 Nov 2022	PDF

MATERIAL SAFETY DATA SHEET

Test	Condition	No.	Date	Download
Material Safety Data Sheet			30 Sep 2021	PDF

CARE & MAINTENANCE

Regular gentle vacuum cleaning helps to preserve the fabric's attractive colour and appearance.