


# DELTACOUSTIC

Semi-transparent curtain fabric with sound absorption properties. The ultra-technical weave with its natural matt shimmering surface is available in colours which were inspired by nature bestowing a note of elegance and comfort to an interior. Deltacoustic lets the daylight into the interior and captivates with aesthetics and functionality. It possesses a high sound absorption coefficient of alpha value 0.60.





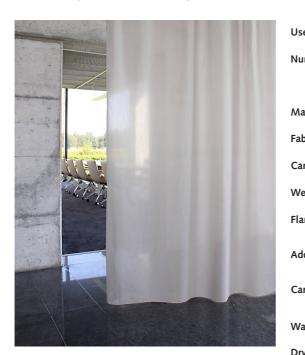



Use:	Semi-transparent curtain fabric					
Number of colours:	17 Special colours available from 300 m / 330 yds upwards.					
Material:	100% Flameretardant polyester (Trevira CS)					
Fabric width:	300 cm/118 inch/3.28 yard					
Can be railroaded:	Can be railroaded					
Weight:	125 g/m²					
Flame-retardant properties:	*					
Additional use:	11 mg					
Care:	$\underline{w} \land \underline{\otimes} a \underline{0}$					
Washing (length shrinkage):	1%					
Dry cleaning (length shrinkage)	Dry cleaning (length shrinkage): 1.5%					
Sound absorption:	Alpha value 0.60					
Certificates / tests: *all testing reports can be downloaded from our website under product details	Fire Test DIN 4102 B1 Fire Test Japan Lightfastness certificate Lichttransmission DIN EN 410 Sound absorption ISO 354 / ISO 11654					



## 6réation baumann

## DELTACOUSTIC

Col. 0061	Col. 0062	Col. 0063	Col. 0064	Col. 0065	Col. 0066
Col. 0067	Col. 0068	Col. 0069	Col. 0070	Col. 0071	Col. 0072
Col. 0073	Col. 0074	Col. 0075	Col. 0076	Col. 0077	

### CARE SYMBOLS FOR TEXTILES

Washing (wash tub)			
95	Normal process 95°		
95	Mild process 95°		
60	Normal process 60°		
60	Mild process 60°		
40	Normal process 40°		
	Mild process 40°		
30	Very mild process 30°		
TW	Hand wash		
$\bowtie$	Do not wash		

The numbers in the washing tub specify the maximum temperature in °C which must not be exceeded. The bar underneath the wash tub characterizes a milder cycle with reduced mechanical action.

Ironing (hand iron) Iron at maximum sole-plate temperature Iron at a medium sole-plate temperature. Take care when using a steam iron Iron at a low sole-plate temperature. Take care when using a Ā steam iron Do not iron X The number of dots indicates the severity as regards to temperature of the handiron. Chlorine-based bleaching (triangle) Chlorine-based bleaching allowed /ci Do not use chlorine-based bleach 乄

#### Tumble drying (circle in a square)

Drying at a lower temperature setting

Do not tumble dry

.

The numbers of dots indicates the severity as regards to temperature of the tumble drying treatment.

#### Dry-cleaning (circle)

	Self-service cleaning also allowed (A)
P	Drycleanable
<u>P</u>	Drycleanable
F	Self-service cleaning not allowed (F)
Ē	Self-service cleaning not allowed (F2)
$\bigotimes$	Do not dry clean
W	Mild professional wet-cleaning

The letters within the circle specify the solvents that can be used. The bar under the circle indicates that certain limitations in the drycleaning process are required. These may concern mechanical action and/or drying temperature and/or water addition in the solvent. – No selfservice cleaning allowed.

Gecko	
	Cleaning with window wiper (Unger method)
	Cleaning by "Spray Extraction" method by machine

## SYMBOLS AND PRODUCT INFORMATION

#### Product information

*	Inherently flame retardant	Oddy-Test	Free from harmful substances / Oddy	AC	Acetate
				CA	Hemp
	Width (cm)	$\bigcirc$	Antimicrobial (counteracts colonisation and multiplying of micro organisms and odours.)	со	Cotton
	Can be asilogeded			EA	Elasthan
<b>←</b>	Can be railroaded		light transmission level Tv, n-h	GL	Glass fibre
	Has to be railroaded		light transmission level Tv. n-nn	LI	Linen
Γ				MD	Modal
	Must not be railroaded	⇒₩	light transmission level Tv, n-dif	ME	Metal
				PA	Polyamide
<b>†</b>	Pattern repeat displaced		light reflection level Pv, n-h	PC	Acrylic
				PE	Polyethylene
	Repeat in warp direction		light absorption level Av	PI	Paper
			PL	Polyester	
	Repeat in weft direction		UV transmission level Tuv		Flameretardant polyester
	Weight (g/m2)	solar transmission level Te, n-h	PLF CS	Flameretardant polyester (Trevira CS)	
kg				PN	Polycarbonat
	Yarn dyed	solar reflection level Pe, n-h	PP	Polypropylene	
				PU	Polyurethan
	Piece dyed		solar absorption level Ae	RA	Ramie
		<b>N</b>			Silk
<b>X</b>	Knitted		Various articles are only available in complete picture repeats. The price is quoted per repeat in each case.	SI	Silicone
				TR	Different material (wood, paper, feathers etc.)
	Woven			VI	Viscose
	Warp print			WM	Wool Mohair
	waip print			WV	Wool
	Screen print/burnout				
	Metalized on one side				

Material information

## SYMBOLS AND PRODUCT INFORMATION

### Intended purposes

Lu	Curtains/Sheers	-ờ-,	Fabrics with very high lightfastness for indoor and outdoor use
	Roller blinds (colours see separate roller blind collection)		Reverso
	Panels (we recommend to process the panels in warp direction to get optimal hang properties)		
	Vertical blinds		
	Roman blinds		
	Upholstery (for heavy use in contract application). Martindale > 30'000		
	Upholstery (for heavy use in domestic application/for normal use in contract application). 20'000 < Martindale < 30'000		
	Upholstery (for normal use in domestic application/for careful use in contract application). Martindale < 20'000		
	Loose cover for careful use in domestic application. Martindale < 5'000		
	Bedspreads		
	Table cloth domestic use		
	Wallcovering		
	Textile wallpaper (can be paper backed, minimum quantity)		
	Cushion		
-1) S	Acoustical fabrics		
	Adhesive Textiles/Gecko/Gecko in the Box		