


Event

Colour 8598-66036

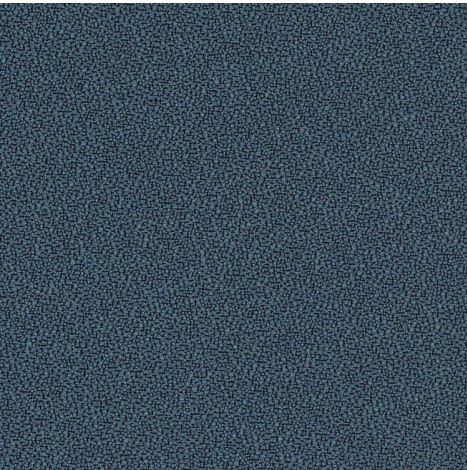

Please be aware that the colour shades can appear different from the real fabric colours. We advise you to request actual fabric samples before ordering.

Colour scale

Design no. 8598 Event (140 cm/55") is available in 24 colours



Event is a crepe upholstery fabric made from 100% polyester. With its crisp look, distinctive pebbly texture, and fresh colour palette, Event offers a confident and contemporary interpretation of the classic crepe fabric. The fabrics is washable at up to 60°C and is suitable for environments with special requirements regarding cleaning.

100% recyclable polyester
Meets Möbelfakta requirements

Design and colours are developed by Inger Mosholt Nielsen

Order

Please sign in to
order fabrics and
samples.



Product specifications

Characteristics

Design no.

Performance

Abrasion

8598 — Event

Application

Upholstery

Panel

Composition

100% Polyester

Weight

420 g/lm — 13.55 oz/lin.yd

Width

140 cm — 55 inches

Environment

Environment, health, and safety

OEKO-TEX® STANDARD 100

EU Ecolabel

Meets Möbelfakta requirements

VOC emission

Ansi/Bifma VOC test M7.1

100,000 — rubs martindale (EN ISO 12947-2)

100,000 — double rubs wyzenbeek (ASTM D4157) (heavy duty upholstery)

Pilling

4-5 — scale 1-5, max. 5 (EN ISO 12945-2)

Light fastness

5-7 — scale 1-8, max. 8 (EN ISO 105-B02)

Rubbing fastness dry/wet

4-5/4-5 — scale 1-5, max. 5 (EN ISO 105x12)

Flammability

BS EN 1021-1 Cigarette

BS EN 1021-2 Match

ÖNORM A3800-B1-B3825-Q1 UK

CA TB 117-2013

ASTM E84 Class 1(Adhered)

Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemicals.

US ACT pass

 AATCC 8 or 116 Dry/wet crocking

 ASTM D4157-07 Wyz abrasion (heavy duty) 100k

 ASTM D3511 Pilling

 AATCC 16 Light fastness

 CA TB 117-2013

 ASTM E84 Class 1(Adhered)

Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

Certificates

Abrasion resistance

Test	Condition	No.	Date	Download
BS EN ISO 12947-2/14465	In accordance with EN 14465	144420817	08 Aug 2025	PDF
ASTM D4157-07 Wyz abrasion (heavy duty) 100k		26-002577	28 Apr 2026	PDF

Pilling

Test	Condition	No.	Date	Download
BS EN ISO 12945-2		144420817	29 Jul 2025	PDF
ASTM D3511 Pilling		21-006186	04 Jan 2022	PDF

Colour fastness to light

Test	Condition	No.	Date	Download
BS EN ISO 105 B02 Method 2		45809-01	17 Mar 2011	PDF
BS EN ISO 105 B02		2026AN2395	17	PDF

Method 2

Sep
2026AATCC 16 Light
fastness

2022AN0017

19 [PDF](#)
Jan
2022

Dry and wet rubbing/crocking

Test	Condition	No.	Date	Download
BS EN ISO 105-X12 Rubbing dry/wet		45809-01	17 Mar 2011	PDF
BS EN ISO 105-X12 Rubbing dry/wet		2026AN2532	22 Sep 2026	PDF
AATCC 8 or 116 Dry/wet crocking		2022AN0017	19 Jan 2022	PDF

Seam slippage

Test	Condition	No.	Date	Download
BS EN ISO 13936-2		A 893562-5	14 Jan 2020	PDF
ASTM D4034 Yarn slippage at a sewn seam		3-29298-1	08 Nov 2018	PDF

Breaking Force

Test	Condition	No.	Date	Download
ASTM D5034 Breaking force		3-29298-0	07 Nov 2018	PDF

Flammability

Test	Condition	No.	Date	Download
BS EN 1021-1 Cigarette	20-22 kg/m3 non-fire retardant polyurethane foam	23/63236H/06/25	27 Jun 2025	PDF
BS EN 1021-2 Match	35 kg/m3 CMHR foam	23/63236H/06/25	27 Jun 2025	PDF
ÖNORM A3800-B1-B3825-Q1 UK		VN736 165086.1	06 Feb 2020	PDF
CA TB 117-2013		25-001505	04 Jun 2025	PDF
ASTM E84 Class 1(Adhered)	Adhered	3-90600-0	28 Sep 2015	PDF

VOC emission

Test	Condition	No.	Date	Download
Ansi/Bifma VOC test M7.1		392-2025-00484401	09 Oct 2025	PDF

Resistance to Bleach Cleaning

Test	Condition	No.	Date	Download
Internal test according BIFMA HCF 8.1 and ACT Method 1	1:10 Sodium Hypochlorite 5,25-6,25%		05 Oct 2020	PDF

Material Safety Data Sheet

Test	Condition	No.	Date	Download
Material Safety Data			30	PDF