


XPRESS

COLOUR 8622-66010

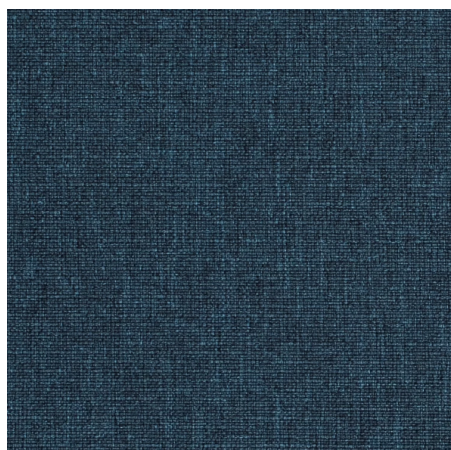

Please be aware that the colour shades can appear different from the real fabric colours. We advise you to request actual fabric samples before ordering.

COLOUR SCALE

Design no. 8622 Xpress (170 cm/67") is available in 22 colours



With its contemporary appearance suggesting natural fibres, Xpress is suitable for a wide range of uses. Xpress is a light polyester fabric intended for upholstery of wall panels and freestanding screens. Xpress is also useful for sound-absorbing wall panels, headboards and frames for beds in the public and private sectors. Due to its lamination, Xpress can be combined with other materials to obtain specific upholstery and usage properties such as volume, softness or adhesiveness. This makes the fabric extremely useful, especially in the bed industry and for wall partitions.

Design and colours are developed by Inger Mosholt Nielsen



STANDARD
100
1076-182
DTI
www.oeko-tex.com



PRODUCT SPECIFICATIONS

CHARACTERISTICS

Design no.
8622 — Xpress

Application
Screen
Bedding

Composition
Fabric: 100% polyester
Foam: 100% polyurethane
Backing: 100% polyester

Weight
270 g/lm — 8.71 oz/lin.yd

Width
170 cm — 67 inches

PERFORMANCE

Abrasion
35,000 — rubs martindale (EN ISO 12947-2)

Pilling
4-5 — scale 1-5, max. 5 (EN ISO 12945-2)

Light fastness
5-7 — scale 1-8, max. 8 (EN ISO 105-B02)

Rubbing fastness dry/wet
4-5/4-5 — scale 1-5, max. 5 (EN ISO 105x12)

Flammability
[BS EN 1021-1 Cigarette](#)
[BS EN 1021-2 Match](#)
[BS 476 Part 7 class 1](#)

Will also pass other flammability standards.
Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemicals.

CERTIFICATES

ACOUSTIC TEST AIR FLOW RESISTANCE

Test	Condition	No.	Date	Download
EN 29053 & ISO 9053-1 (airflow resistance)		M104146/18	09 Feb 2015	PDF

ACOUSTIC TEST SOUND ABSORPTION

Test	Condition	No.	Date	Download
ISO 354 & ISO 11654 (sound absorption)		M104146/17	06 Feb 2015	PDF

ABRASION RESISTANCE

Test	Condition	No.	Date	Download
BS EN ISO 12947-2/14465	In accordance with EN 14465	103855-01	29	PDF

Jan
2019

PILLING

Test	Condition	No.	Date	Download
BS EN ISO 12945-2	In accordance with EN 14465	103855	28 Jan 2019	PDF

COLOUR FASTNESS TO LIGHT

Test	Condition	No.	Date	Download
BS EN ISO 105 B02 Method 2		111114	07 Aug 2019	PDF

DRY AND WET RUBBING/CROCKING

Test	Condition	No.	Date	Download
BS EN ISO 105-X12 Rubbing dry/wet		TSNT00690339	28 Oct 2014	PDF
BS EN ISO 105-X12 Rubbing dry/wet		103855	28 Jan 2019	PDF

FLAMMABILITY

Test	Condition	No.	Date	Download
BS EN 1021-1 Cigarette	20-22 kg/m3 non-fire retardant polyurethane foam	85859	21 Jun 2017	PDF
BS EN 1021-2 Match	35 kg/m3 CMHR foam	84058	15 May 2017	PDF
BS 476 Part 7 class 1		67056-02	14 Nov 2014	PDF

RESISTANCE TO BLEACH CLEANING

Test	Condition	No.	Date	Download
Internal test according BIFMA HCF	1:10 Sodium Hypochlorite 5,25-		05	PDF