

Chili


Colour 2488-61174



Please be aware that the colour shades can appear different from the real fabric colours. We advise you to request actual fabric samples before ordering.

Colour scale

Design no. 2488 Chili (140 cm/55") is available in 47 colours

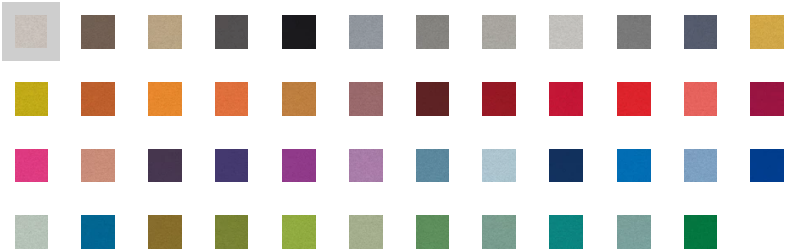

Made from 100% post-consumer recycled flame retardant polyester, Chili offers superior flame retardancy and is designed for use in environments, where fire safety is an absolute top priority. From hotels, to hospitals and schools, Chili meets even the most stringent flammability requirements.

Meets Möbelfakta requirements

Designed by: Inger Mosholt Nielsen
Colours designed by: Cenk Kivrikoglu

Order

Please sign in to
order fabrics and
samples.



Product specifications

Characteristics

Design no.

2488 — Chili

Application

Upholstery

Composition

100% Post-consumer recycled polyester fr (fr inside the fiber)

Weight

470 g/lm — 15.16 oz/lin.yd

Width

140 cm — 55 inches

Environment

Environment, health, and safety

OEKO-TEX® STANDARD 100

EU Ecolabel

Meets Möbelfakta requirements

VOC emission

Ansi/Bifma VOC test M7.1

Potential environmental impacts

Environmental Product Declaration (EPD)

Performance

Abrasion

60,000 — rubs martindale (EN ISO 12947-2)

100,000 — double rubs wyzenbeek (ASTM D4157) (heavy duty upholstery)

Pilling

4-5 — scale 1-5, max. 5 (EN ISO 12945-2)

Light fastness

5-8 — scale 1-8, max. 8 (EN ISO 105-B02)

Rubbing fastness dry/wet

4-5/4-5 — scale 1-5, max. 5 (EN ISO 105x12)

Flammability

CA TB 117-2013

NF P 92-503/504/505 M1

DIN 4102 - B1

Class Uno UNI 9175 Class 1 I EMME

BS EN 1021 1&2 Cigarette and Match

BS EN 1021-1 Cigarette

BS 5852 Crib 5

AM 18 - NF D 60-013-(only for fabric)

DIN EN 13501-1 B-s1,d0

IMO EC Declaration of Conformity

EU,UK

IMO MSC 307(88) Annex 1 part 8

IMO MSC 307(88) Annex 1 part 8 UK

MED Certificate IMO

MED Certificate IMO UK

Will also pass other flammability

standards. Flame retardant performance is dependent upon the foam used.

US ACT pass

-  [ASTM D4157-07 Wyz abrasion \(heavy duty\) 100k](#)
-  [ASTM D3511 Pilling](#)
-  [AATCC 16 Light fastness](#)
-  [AATCC 8 or 116 Dry/wet crocking](#)
-  [CA TB 117-2013](#)

Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

Certificates

Acoustic test sound absorption

Test	Condition	No.	Date	Download
ISO 354 & ISO 11654 (sound absorption)		B104146/68	08 Nov 2024	PDF

Acoustic test air flow resistance

Test	Condition	No.	Date	Download
EN 29053 & ISO 9053-1 (airflow resistance)		M104146/41	04 Mar 2019	PDF

Abrasion resistance

Test	Condition	No.	Date	Download
------	-----------	-----	------	----------

BS EN ISO 12947-2/14465	In accordance with EN 14465	144420355	14 Aug 2025	PDF
-------------------------	-----------------------------	-----------	-------------	---------------------

ASTM D4157-07 Wyz abrasion (heavy duty) 100k		3-26795-1	09 Jul 2018	PDF
--	--	-----------	-------------	---------------------

Pilling

Test	Condition	No.	Date	Download
BS EN ISO 12945-2		144420355	14 Aug 2025	PDF
ASTM D3511 Pilling		25-001547	09 Jun 2025	PDF

Colour fastness to light

Test	Condition	No.	Date	Download
BS EN ISO 105 B02 Method 2		2025AN2072	06 Aug 2025	PDF
AATCC 16 Light fastness		2025AN1975	26 Jun 2025	PDF

Dry and wet rubbing/crocking

Test	Condition	No.	Date	Download
BS EN ISO 105-X12 Rubbing dry/wet		2025AN1976	26 Jun 2025	PDF
AATCC 8 or 116 Dry/wet crocking		2025AN1975	26 Jun 2025	PDF

Flammability

Test	Condition	No.	Date	Download
CA TB 117-2013		25-001547	09 Jun 2025	PDF
NF P 92-503/504/505 M1		CM-21-P-109	23 Sep 2021	PDF
DIN 4102 - B1		2018-1114	08 Feb 2018	PDF
Class Uno UNI 9175 Class 1 I EMME		317731 / 1	19 Oct 2021	PDF
BS EN 1021 1&2 Cigarette and Match	35 kg/m3 CMHR foam	23/63236C/06/25	27 Jun 2025	PDF
BS EN 1021-1 Cigarette	20-22 kg/m3 non- fire retardant polyurethane foam	23/63236C2/06/25	07 Jul 2025	PDF
BS 5852 Crib 5	35 kg/m3 CMHR foam	23/63236C1/06/25	27 Jun 2025	PDF
AM 18 - NF D 60-013- (only for fabric)		PM - 19 - 011	17 Apr 2019	PDF
DIN EN 13501-1 B-s1,d0		19AN3063	12 Nov 2019	PDF
IMO EC Declaration of Conformity EU,UK			29 Sep 2026	PDF

IMO MSC 307(88) Annex 1 part 8	SH01672	10 Jan 2025	PDF
IMO MSC 307(88) Annex 1 part 8 UK	53164	10 Feb 2025	PDF
MED Certificate IMO	SH01686	07 Feb 2025	PDF
MED Certificate IMO UK	53167	07 Feb 2025	PDF

Seam slippage

Test	Condition	No.	Date	Download
BS EN ISO 13936-2		99561-01	24 Jul 2018	PDF
ASTM D4034 Yarn slippage at a sewn seam		3-26795-3	03 Jul 2018	PDF

Colour Fastness to Perspiration

Test	Condition	No.	Date	Download
BS EN ISO 105-E04		99561-01	24 Jul 2018	PDF
AATCC 15 Perspiration		3-26795-7	25 Jun 2018	PDF

Breaking Force

Test	Condition	No.	Date	Download
------	-----------	-----	------	----------

ASTM D5034	3-26795-4	03	PDF
Breaking force		Jul	
		2018	

Wash stability

Test	Condition	No.	Date	Download
BS EN ISO 6330 6M 60 C PC Flat dry	Dimensional Stability to Washing at 60dg.C	99561-01	24 Jul 2018	PDF

VOC emission

Test	Condition	No.	Date	Download
Ansi/Bifma VOC test M7:1		392-2025- 00484401	09 Oct 2025	PDF

Resistance to Bleach Cleaning

Test	Condition	No.	Date	Download
Internal test according BIFMA HCF 8.1 and ACT Method 1	1:10 Sodium Hypochlorite 5,25- 6,25%		05 Oct 2020	PDF

Material Safety Data Sheet

Test	Condition	No.	Date	Download
Material Safety Data Sheet			30 Sep 2021	PDF

Potential environmental impacts

Test	Condition	No.	Date	Download
Environmental Product Declaration (EPD)			23 Jul 2025	PDF