

Connect


Colour 2516-61207



Please be aware that the colour shades can appear different from the real fabric colours. We advise you to request actual fabric samples before ordering.

Colour scale

Design no. 2515/2516/2517/2518 Connect (140 cm/55") is available in 38 colours

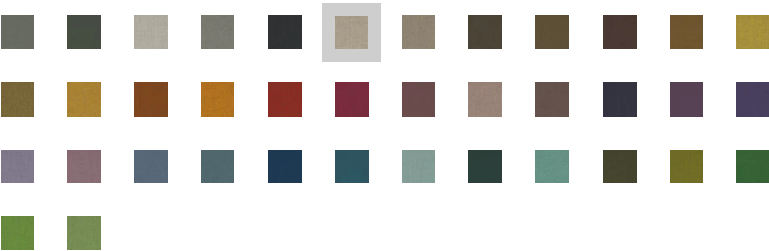

Upholstery fabric Connect is distinguished by its fusion of wool and post-consumer recycled polyester and by its colours inspired by both nature and vintage. With its unique construction based on a minimum use of materials, Connect offers high-performance properties and a natural rustic elegance with a discreet metallic reflection.

Meets Möbelfakta requirements

Design and colours are developed by Cenk Kivrikoglu

Order

Please sign in to order fabrics and samples.



Product specifications

Characteristics

Design no.

2515 / 2516 / 2517 / 2518 — Connect

Application

Upholstery

Composition

48% New Zealand wool, 41% Post-consumer rec.pes., 9% Pa, 2% Pes

Weight

370 g/lm — 11.93 oz/lin.yd

Width

140 cm — 55 inches

Environment

Environment, health, and safety

OEKO-TEX® STANDARD 100

EU Ecolabel

Meets Möbelfakta requirements

VOC emission

Ansi/Bifma VOC test M7.1

Performance

Abrasion

90,000 — rubs martindale (EN ISO 12947-2)

60,000 — rubs martindale (ASTM D4966) (heavy duty upholstery)

Pilling

4-5 — scale 1-5, max. 5 (EN ISO 12945-2)

Light fastness

5-7 — scale 1-8, max. 8 (EN ISO 105-B02)

Rubbing fastness dry/wet

4-5/4-5 — scale 1-5, max. 5 (EN ISO 105x12)

Flammability

BS EN 1021-2 Match

BS EN 1021-1 Cigarette

BS 5852 Crib 5

CA TB 117-2013

Class Uno UNI 9175 Class 1 I EMME

BS 476 Part 7 class 1

Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemicals.

US ACT pass

A ASTM D4966 Martindale (heavy duty)

☀ AATCC 16 Light fastness

☹ AATCC 8 or 116 Dry/wet crocking

✧ [ASTM D4970 Pilling](#)

🔥 [CA TB 117-2013](#)

Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

Certificates

Abrasion resistance

Test	Condition	No.	Date	Download
BS EN ISO 12947-2/14465	In accordance with EN 14465	144420808	08 Aug 2025	PDF
ASTM D4966 Martindale (heavy duty)		25-001544	09 Jun 2025	PDF

Pilling

Test	Condition	No.	Date	Download
BS EN ISO 12945-2		144420808	23 Jul 2025	PDF
ASTM D4970 Pilling		25-001544	09 Jun 2025	PDF

Colour fastness to light

Test	Condition	No.	Date	Download
BS EN ISO 105 B02 Method 2		2025AN1764	04 Jul	PDF

2025

AATCC 16 Light
fastness

2025AN1764

04 [PDF](#)
Jul
2025

Dry and wet rubbing/crocking

Test	Condition	No.	Date	Download
BS EN ISO 105-X12 Rubbing dry/wet		113827A	02 Jan 2020	PDF
AATCC 8 or 116 Dry/wet crocking		3-35832-1	05 Dec 2019	PDF

Flammability

Test	Condition	No.	Date	Download
BS EN 1021-2 Match	35 kg/m3 CMHR foam	23/63236D1/06/25	27 Jun 2025	PDF
BS EN 1021-1 Cigarette	20-22 kg/m3 non-fire retardant polyurethane foam	23/63236D/06/25	27 Jun 2025	PDF
BS 5852 Crib 5	35 kg/m3 CMHR foam	23/63236D1/06/25	27 Jun 2025	PDF
CA TB 117-2013		25-001544	09 Jun 2025	PDF
Class Uno UNI 9175 Class 1 I EMME		293097 / 1	15 Jul 2020	PDF
BS 476 Part 7 class 1		27/05680/08/11	23 Aug	PDF

Breaking Force

Test	Condition	No.	Date	Download
ASTM D5034 Breaking force		3-35831-4	03 Dec 2019	PDF

Seam slippage

Test	Condition	No.	Date	Download
ASTM D4034 Yarn slippage at a sewn seam		3-35831-5	04 Dec 2019	PDF
BS EN ISO 13936-2		113827A	02 Jan 2020	PDF

Colour fastness to dry cleaning

Test	Condition	No.	Date	Download
BS EN ISO 105-D01		113827A	02 Jan 2020	PDF

VOC emission

Test	Condition	No.	Date	Download
Ansi/Bifma VOC test M7.1		392-2025- 00560701	02 Dec 2025	PDF

Material Safety Data Sheet

Test	Condition	No.	Date	Download
Material Safety Data Sheet			30 Sep	PDF

Care & Maintenance

Dry cleaning P(S)

