


# RENEWED LOOP

## COLOUR 2326-68295

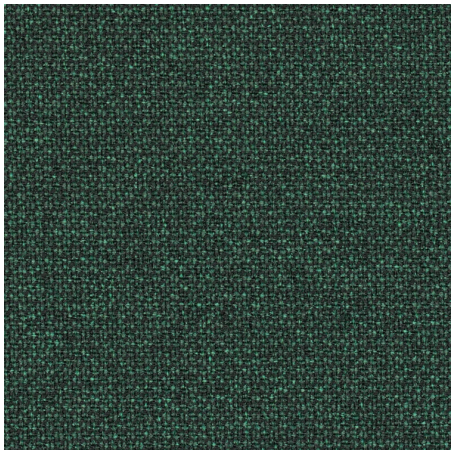

Please be aware that the colour shades can appear different from the real fabric colours. We advise you to request actual fabric samples before ordering.

## COLOUR SCALE

Design no. 2324/2325/2326/2327 Renewed Loop (140 cm/55") is available in 47 colours



Renewed Loop is a game-changing innovation based on textile-to-textile recycling and carefully crafted from a blend of recycled textile waste and post-consumer recycled polyester. 100% recycled and fully recyclable, Renewed Loop closes the loop and creates a circular system in which textile waste is eliminated and materials are recycled again and again. Renewed Loop is a cross-functional fabric and is also available in a screen version made specifically for screen and panel applications.

100% recyclable polyester  
Meets Möbelfakta requirements

Design and colours are developed by Cenk Kivrikoglu



## PRODUCT SPECIFICATIONS

### CHARACTERISTICS

Design no.

### PERFORMANCE

Abrasion

2324 / 2325 / 2326 / 2327 — Renewed Loop

### Application

Upholstery

Panel

Screen

### Composition

100% post-consumer/post-industrial recycled polyester (contains 3-10 % textile waste)

### Weight

370 g/lm — 11.93 oz/lin.yd

### Width

140 cm — 55 inches

## ENVIRONMENT

### Environment, health, and safety

Meets Möbelfakta requirements

### VOC emission

Ansi/Bifma VOC test M7.1

100,000 — rubs martindale (EN ISO 12947-2)

100,000 — double rubs wyzenbeek (ASTM D4157) (heavy duty upholstery)

### Pilling

4-5 — scale 1-5, max. 5 (EN ISO 12945-2)

### Light fastness

7-8 — scale 1-8, max. 8 (EN ISO 105-B02)

### Rubbing fastness dry/wet

4-5/4-5 — scale 1-5, max. 5 (EN ISO 105x12)

### Flammability

BS EN 1021 1&2 Cigarette and Match

BS EN 1021-1 Cigarette

BS EN 1021-2 Match

DIN EN 13501-1 B-s1,d0(glued)

CA TB 117-2013

ASTM E 84 Class 1(Adhered)

BS 5852 Part 1 0,1 Cigarette & Match, The Furniture and Furnishing Regulations 1988(option flame retardant)

BS 5852 Crib 5 (option flame retardant)

Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemicals.

### US ACT pass

 AATCC 8 or 116 Dry/wet crocking

 CA TB 117-2013

 ASTM E 84 Class 1(Adhered)

 ASTM D4157-07 Wyz abrasion (heavy duty) 100k

 ASTM D3511 Pilling

 AATCC 16 Light fastness

Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

# CERTIFICATES

## ACOUSTIC TEST AIR FLOW RESISTANCE

| Test                                       | Condition | No.        | Date        | Download            |
|--------------------------------------------|-----------|------------|-------------|---------------------|
| EN 29053 & ISO 9053-1 (airflow resistance) |           | B104146/63 | 23 Feb 2023 | <a href="#">PDF</a> |

## ABRASION RESISTANCE

| Test                                         | Condition                   | No.       | Date        | Download            |
|----------------------------------------------|-----------------------------|-----------|-------------|---------------------|
| BS EN ISO 12947-2/14465                      | In accordance with EN 14465 | 28513318a | 27 Mar 2023 | <a href="#">PDF</a> |
| ASTM D4157-07 Wyz abrasion (heavy duty) 100k |                             | 23-000498 | 02 Mar 2023 | <a href="#">PDF</a> |

## PILLING

| Test               | Condition | No.       | Date        | Download            |
|--------------------|-----------|-----------|-------------|---------------------|
| BS EN ISO 12945-2  |           | 28513318a | 27 Mar 2023 | <a href="#">PDF</a> |
| ASTM D3511 Pilling |           | 23-000498 | 02 Mar 2023 | <a href="#">PDF</a> |

## COLOUR FASTNESS TO LIGHT

| Test                       | Condition | No.        | Date        | Download            |
|----------------------------|-----------|------------|-------------|---------------------|
| BS EN ISO 105 B02 Method 2 |           | 2023AN6064 | 10 Mar 2023 | <a href="#">PDF</a> |
| AATCC 16 Light fastness    |           | 2023AN6064 | 10 Mar 2023 | <a href="#">PDF</a> |

## DRY AND WET RUBBING/CROCKING

| Test                              | Condition | No.        | Date | Download            |
|-----------------------------------|-----------|------------|------|---------------------|
| BS EN ISO 105-X12 Rubbing dry/wet |           | 2023AN6125 | 27   | <a href="#">PDF</a> |

Apr  
2023

AATCC 8 or 116 Dry/wet crocking

2023AN6125

27 [PDF](#)  
Apr  
2023

## SEAM SLIPPAGE

| Test                                    | Condition | No.       | Date              | Download            |
|-----------------------------------------|-----------|-----------|-------------------|---------------------|
| BS EN ISO 13936-2                       |           | 28513318a | 27<br>Mar<br>2023 | <a href="#">PDF</a> |
| ASTM D4034 Yarn slippage at a sewn seam |           | 23-000498 | 02<br>Mar<br>2023 | <a href="#">PDF</a> |

## FLAMMABILITY

| Test                               | Condition                                        | No.                      | Date              | Download            |
|------------------------------------|--------------------------------------------------|--------------------------|-------------------|---------------------|
| BS EN 1021 1&2 Cigarette and Match | 35 kg/m3 CMHR foam                               | 23/60290A<br>Supp1/10/22 | 02<br>Mar<br>2023 | <a href="#">PDF</a> |
| BS EN 1021-1 Cigarette             | 20-22 kg/m3 non-fire retardant polyurethane foam | 23/60664Supp/02/23       | 02<br>Mar<br>2023 | <a href="#">PDF</a> |
| BS EN 1021-2 Match                 | 50 kg/m3 non fire retardant foam                 | 23/60874A/04/23          | 09<br>May<br>2023 | <a href="#">PDF</a> |
| DIN EN 13501-1 B-s1,d0(glued)      |                                                  | 2023AN0784               | 19<br>Apr<br>2023 | <a href="#">PDF</a> |
| CA TB 117-2013                     |                                                  | 23-000498                | 02<br>Mar<br>2023 | <a href="#">PDF</a> |
| ASTM E 84 Class 1(Adhered)         | Adhered                                          | 23-001541                | 09<br>Nov<br>2023 | <a href="#">PDF</a> |

## FLAMMABILITY WITH FLAMERETARDANT TREATMENT

| Test                                                               | Condition                      | No.             | Date      | Download            |
|--------------------------------------------------------------------|--------------------------------|-----------------|-----------|---------------------|
| BS 5852 Part 1 0,1 Cigarette & Match, The Furniture and Furnishing | 20-22 kg/m3 non-fire retardant | 23/62444C/09/24 | 02<br>Oct | <a href="#">PDF</a> |

|                                          |                    |                 |                                 |
|------------------------------------------|--------------------|-----------------|---------------------------------|
| Regulations 1988(option flame retardant) | polyurethane foam  |                 | 2024                            |
| BS 5852 Crib 5 (option flame retardant)  | 35 kg/m3 CMHR foam | 23/62490A/10/24 | 10 Dec 2024 <a href="#">PDF</a> |

## BREAKING FORCE

| Test                      | Condition | No.       | Date        | Download            |
|---------------------------|-----------|-----------|-------------|---------------------|
| ASTM D5034 Breaking force |           | 23-000498 | 02 Mar 2023 | <a href="#">PDF</a> |

## VOC EMISSION

| Test                     | Condition | No.      | Date        | Download            |
|--------------------------|-----------|----------|-------------|---------------------|
| Ansi/Bifma VOC test M7.1 |           | 961089-C | 24 Jan 2024 | <a href="#">PDF</a> |

## RESISTANCE TO BLEACH CLEANING

| Test                                                   | Condition                           | No. | Date        | Download            |
|--------------------------------------------------------|-------------------------------------|-----|-------------|---------------------|
| Internal test according BIFMA HCF 8.1 and ACT Method 1 | 1:10 Sodium Hypochlorite 5,25-6,25% |     | 27 Apr 2023 | <a href="#">PDF</a> |

## MATERIAL SAFETY DATA SHEET

| Test                       | Condition | No.   | Date        | Download            |
|----------------------------|-----------|-------|-------------|---------------------|
| Material Safety Data Sheet |           | 90323 | 09 Mar 2023 | <a href="#">PDF</a> |

## CARE & MAINTENANCE

Wash or dry cleaning P(W).

Renewed Loop is made of polyester which is a material suited for environments with special requirements for cleaning.

Click here for guidance relating to disinfection. [Link to Stain Guide...](#)