


TALE

COLOUR 2527-66185

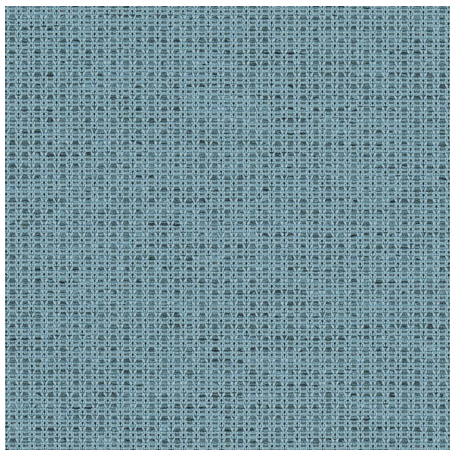

Please be aware that the colour shades can appear different from the real fabric colours. We advise you to request actual fabric samples before ordering.

COLOUR SCALE

Design no. 2527 Tale (140 cm/55") is available in 15 colours



Tale is a self-supporting mesh fabric made from 100% post-consumer recycled polyester designed specifically to add character, comfort, and style to task chair backrests. Distinguished by a remarkable harlequin structure, an irregular melange expression, a nature-inspired, crafted texture, and soft fabric feel, Tale adds a new residential dimension to the technical mesh fabric. Tale is designed as the perfect match for upholstery fabric Tonal, and together the two fabrics offer unique mix and match opportunities for stylish task chair designs.

100% recyclable polyester
Meets Möbelfakta requirements

Design and colours are developed by Cenk Kivrikoglu



STANDARD
100
1076-182
DTI
www.oeko-tex.com



PRODUCT SPECIFICATIONS

CHARACTERISTICS

Design no.

2527 — Tale

Application

Upholstery

Composition

100% Post-consumer recycled polyester

Weight

365 g/lm — 11.77 oz/lin.yd

Width

140 cm — 55 inches

ENVIRONMENT

Environment, health, and safety

Meets Möbelfakta requirements

VOC emission

[Ansi/Bifma VOC test M7.1](#)

PERFORMANCE

Abrasion

100,000 — rubs martindale (EN ISO 12947-2)

100,000 — double rubs wyzenbeek (ASTM D4157) (heavy duty upholstery)

Pilling

5 — scale 1-5, max. 5 (EN ISO 12945-2)

Light fastness

6-8 — scale 1-8, max. 8 (EN ISO 105-B02)

Rubbing fastness dry/wet

4-5/4-5 — scale 1-5, max. 5 (EN ISO 105x12)

Flammability

[BS EN 1021-1 Cigarette](#)

[BS EN 1021 1&2 Cigarette and Match](#)

[CA TB 117-2013](#)

Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemicals.

US ACT pass

 [ASTM D4157-07 Wyz abrasion \(heavy duty\) 100k](#)

 [ASTM D3511 Pilling](#)

 [AATCC 16 Light fastness](#)

 [AATCC 8 or 116 Dry/wet crocking](#)

 [CA TB 117-2013](#)

Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

CERTIFICATES

ABRASION RESISTANCE

Test	Condition	No.	Date	Download
BS EN ISO 12947-2/14465	In accordance with EN 14465	28512225	13	PDF

Jan
2022

ASTM D4157-07 Wyz abrasion
(heavy duty) 100k

21-006465

04
Jan
2022

[PDF](#)

PILLING

Test	Condition	No.	Date	Download
BS EN ISO 12945-2		28512225	13 Jan 2022	PDF
ASTM D3511 Pilling		21-006467	04 Jan 2022	PDF

COLOUR FASTNESS TO LIGHT

Test	Condition	No.	Date	Download
BS EN ISO 105 B02 Method 2		2021AN2449	13 Jan 2022	PDF
AATCC 16 Light fastness		2021AN2449	13 Jan 2022	PDF

DRY AND WET RUBBING/CROCKING

Test	Condition	No.	Date	Download
BS EN ISO 105-X12 Rubbing dry/wet		2021AN2698	21 Jan 2022	PDF
AATCC 8 or 116 Dry/wet crocking		2021AN2698	21 Jan 2022	PDF

SEAM SLIPPAGE

Test	Condition	No.	Date	Download
BS EN ISO 13936-2		28512225	13 Jan 2022	PDF
ASTM D4034 Yarn slippage at a sewn seam		21-006466	10 Jan	PDF

WASH STABILITY

Test	Condition	No.	Date	Download
BS EN ISO 6330 6M 60 C PC Flat dry		28512225	13 Jan 2022	PDF

COLOUR FASTNESS TO PERSPIRATION

Test	Condition	No.	Date	Download
BS EN ISO 105-E04		28512225	13 Jan 2022	PDF

BREAKING FORCE

Test	Condition	No.	Date	Download
ASTM D5034 Breaking force		21-006466	10 Jan 2022	PDF

FLAMMABILITY

Test	Condition	No.	Date	Download
BS EN 1021-1 Cigarette	20-22 kg/m3 non-fire retardant polyurethane foam	23/59187A/21	20 Dec 2021	PDF
BS EN 1021 1&2 Cigarette and Match	35 kg/m3 CMHR foam	23/59187B/21	20 Dec 2021	PDF
CA TB 117-2013		21-006466	10 Jan 2022	PDF

VOC EMISSION

Test	Condition	No.	Date	Download
Ansi/Bifma VOC test M7.1		961098-C	24 Jan 2024	PDF

RESISTANCE TO BLEACH CLEANING

Test	Condition	No.	Date	Download
Internal test according BIFMA HCF 8.1 and ACT Method 1			24 Jan 2022	PDF

MATERIAL SAFETY DATA SHEET

Test	Condition	No.	Date	Download
Material Safety Data Sheet			17 Mar 2022	PDF

CARE & MAINTENANCE

Wash or dry cleaning P(W).

Tale is made of polyester which is a material suited for environments with special requirements for cleaning.

Click here for guidance relating to disinfection. [Link to Stain Guide...](#)



60°C shrinkage max 1.0%