


Amaze Loop


Colour 2573-68323

Colour scale

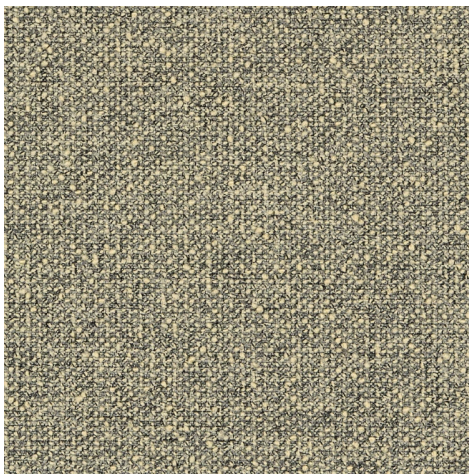

Please be aware that the colour shades can appear different from the real fabric colours. We advise you to request actual fabric samples before ordering.

Design no. 2572/2573 Amaze Loop (140 cm/55") is available in 32 colours

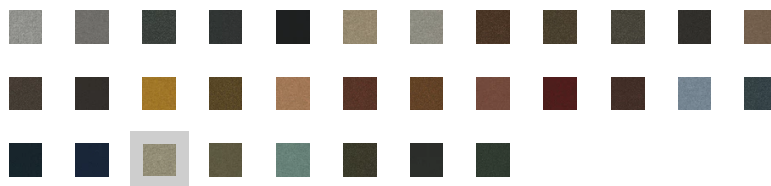

Amaze Loop, where durability meets a bright colour palette, transforms spaces with its inviting atmosphere. Designed for soft seating, high-traffic areas, and hospitality settings, Amaze Loop's balanced use of lighter and darker colours echoes the textures found in nature and embraces modern luxury. Ideal for creating interiors that demand both quality, timeless, and aesthetic appeal. As part of The Gabriel Closed-Loop (thriving since 2023), Amaze Loop reflects our commitment to the environment and technologies, efficiently managing textile waste from our customers.

100% recyclable polyester
Meets Möbelfakta requirements

Design and colours are developed by Cenk Kivrikoglu

Order

Please sign in to
order fabrics and
samples.



Product specifications

Characteristics

Design no.

2572 / 2573 — Amaze Loop

Application

Upholstery

Panel

Composition

100% post-consumer/post-industrial
rec.pes/pes(contains 2-7% textile
waste)

Weight

515 g/lm — 16.61 oz/lin.yd

Width

140 cm — 55 inches

Environment

Environment, health, and safety

OEKO-TEX® STANDARD 100

EU Ecolabel

Meets Möbelfakta requirements

VOC emission

Ansi/Bifma VOC test M7.1

Performance

Abrasion

100,000 — rubs martindale BS EN
14465 (ISO 12947-2)

100,000 — double rubs wyzenbeek
(ASTM D4157)

Pilling

4-5 — scale 1-5, max. 5 (EN ISO 12945-
2)

Light fastness

7-8 — scale 1-8, max. 8 (EN ISO 105-
B02)

Rubbing fastness dry/wet

4-5/4-5 — scale 1-5, max. 5 (EN ISO
105x12)

Flammability

BS EN 1021-1 Cigarette

BS EN 1021 1&2 Cigarette and Match

CA TB 117-2013

DIN EN 13501-1 B-s1,d0(Adhered)

BS 5852 Crib 5 (option flame retardant)

Class Uno UNI 9175 Class 1 I

EMME(option flame retardant)

Will also pass other flammability
standards. Flame retardant
performance is dependent upon the
foam used. Contains no flame retardant
chemicals.

US ACT pass

 CA TB 117-2013

 [ASTM D4157-07 Wyz abrasion \(heavy duty\)](#)

 [ASTM D3511 Pilling](#)

 [AATCC 16 Light fastness](#)

 [AATCC 8 or 116 Dry/wet crocking](#)

Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

Certificates

Abrasion resistance

Test	Condition	No.	Date	Download
BS EN ISO 12947-2/14465	In accordance with EN 14465	28514685a	29 May 2024	PDF
ASTM D4157-07 Wyz abrasion (heavy duty)		23-003121	24 Apr 2024	PDF

Pilling

Test	Condition	No.	Date	Download
BS EN ISO 12945-2		28514685a	29 May 2024	PDF
ASTM D3511 Pilling		23-003121	24 Apr 2024	PDF

Colour fastness to light

Test	Condition	No.	Date	Download
BS EN ISO 105 B02 Method 2		2024AN1049	22 May 2024	PDF

AATCC 16 Light fastness		2024AN1049	22 May 2024	PDF
----------------------------	--	------------	-------------------	---------------------

Dry and wet rubbing/crocking

Test	Condition	No.	Date	Download
BS EN ISO 105-X12 Rubbing dry/wet		2024AN1757	26 Jul 2024	PDF
AATCC 8 or 116 Dry/wet crocking		2024AN1757	26 Jul 2024	PDF

Wash stability

Test	Condition	No.	Date	Download
BS EN ISO 6330 6M 60 C PC Flat dry		2024AN1048	15 May 2024	PDF
BS EN ISO 6330 7M 74 C PC Flat dry		2024AN1048	15 May 2024	PDF

Seam slippage

Test	Condition	No.	Date	Download
BS EN ISO 13936-2		28514941	22 Jul 2024	PDF
ASTM D4034 Yarn slippage at a sewn		23-003121	24 Apr	PDF

Flammability

Test	Condition	No.	Date	Download
BS EN 1021-1 Cigarette	20-22 kg/m3 non-fire retardant polyurethane foam	23/62028A/04/24	09 May 2024	PDF
BS EN 1021 1&2 Cigarette and Match	35 kg/m3 CMHR foam	23/62028B/04/24	09 May 2024	PDF
CA TB 117-2013		24-001114	21 May 2024	PDF
DIN EN 13501-1 B-s1,d0(Adhered)	Adhered	24AN2937	26 Dec 2024	PDF

Flammability with flameretardant treatment

Test	Condition	No.	Date	Download
BS 5852 Crib 5 (option flame retardant)	35 kg/m3 CMHR foam	23/62586A/11/24	11 Dec 2024	PDF
Class Uno UNI 9175 Class 1 I EMME(option flame retardant)		381481/1	27 Nov 2024	PDF

Breaking Force

Test	Condition	No.	Date	Download
ASTM D5034 Breaking force		24-001114	21 May 2024	PDF

Resistance to Bleach Cleaning

Test	Condition	No.	Date	Download
Internal test according BIFMA HCF 8.1 and ACT Method 1	1:10 Sodium Hypochlorite 5,25- 6,25%		12 Jul 2024	PDF

Material Safety Data Sheet

Test	Condition	No.	Date	Download
Material Safety Data Sheet			30 Apr 2024	PDF

VOC emission

Test	Condition	No.	Date	Download
Ansi/Bifma VOC test M7.1		392-2025- 00484401	09 Oct 2025	PDF

Care & Maintenance

Wash or dry cleaning P(W).

Amaze Loop is made of polyester which is a material suited for environments with special requirements for cleaning.

Click here for guidance relating to disinfection. [Link to Stain Guide...](#)



60°C shrinkage max 2.0%