


CONTOUR MELANGE

COLOUR 2578-60359

Please be aware that the colour shades can appear different from the real fabric colours. We advise you to request actual fabric samples before ordering.

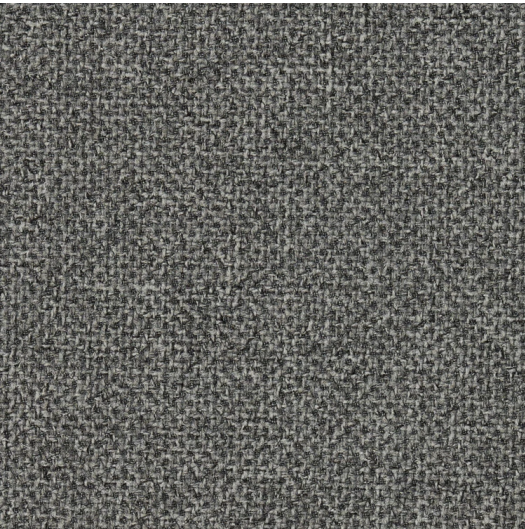

COLOUR SCALE

Design no. 2578 Contour Melange (140 cm/55") is available in 20 colours



Contour Melange is a woven 100% recycled polyester fabric distinguished by its multi-directional stretch and excellent recovery, making it ideal for upholstery of curved shapes. The fabric features three-dimensional textural depth, transforming the ordinary into the extraordinary.

100% recyclable polyester
Meets Möbelfakta requirements

Designed by: Inger Mosholt Nielsen
Colours designed by: Coralie Miessen



PRODUCT SPECIFICATIONS

CHARACTERISTICS

Design no.

2578 — Contour Melange

Application

Upholstery

Panel

Composition

100% Post-consumer recycled polyester

Weight

500 g/lm — 16.13 oz/lin.yd

Width

140 cm — 55 inches

ENVIRONMENT

Environment, health, and safety

[OEKO-TEX® STANDARD 100](#)

[EU Ecolabel](#)

Meets Möbelfakta requirements

VOC emission

[Ansi/Bifma VOC test M7.1](#)

Life Cycle Assessment (LCA)

[LCA Summary Report](#)

PERFORMANCE

Abrasion

100,000 — rubs martindale (EN ISO 12947-2)

100,000 — double rubs wyzenbeek (ASTM D4157)
(heavy duty upholstery)

Pilling

4-5 — scale 1-5, max. 5 (EN ISO 12945-2)

Light fastness

5-8 — scale 1-8, max. 8 (EN ISO 105-B02)

Rubbing fastness dry/wet

4-5/4-5 — scale 1-5, max. 5 (EN ISO 105x12)

Flammability

[BS EN 1021 1&2 Cigarette and Match](#)

[BS EN 1021-1 Cigarette](#)

[CA TB 117-2013](#)

[ASTM E 84 Class 1\(Unadhered\)](#)

Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemicals.

US ACT pass

 [ASTM D4157-07 Wyz abrasion \(heavy duty\) 100k](#)

 [ASTM D3511 Pilling](#)

 [AATCC 16 Light fastness](#)

 [AATCC 8 or 116 Dry/wet crocking](#)

 [CA TB 117-2013](#)

 [ASTM E 84 Class 1\(Unadhered\)](#)

Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

CERTIFICATES

ABRASION RESISTANCE

Test	Condition	No.	Date	Download
------	-----------	-----	------	----------

BS EN ISO 12947-2/14465	In accordance with EN 14465	28514119	03 Jan 2024	PDF
-------------------------	-----------------------------	----------	-------------------	---------------------

ASTM D4157-07 Wyz abrasion (heavy duty) 100k		23-003040	15 Feb 2024	PDF
---	--	-----------	-------------------	---------------------

PILLING

Test	Condition	No.	Date	Download
BS EN ISO 12945-2		28514119	03 Jan 2024	PDF
ASTM D3511 Pilling		23-003040	15 Feb 2024	PDF

COLOUR FASTNESS TO LIGHT

Test	Condition	No.	Date	Download
BS EN ISO 105 B02 Method 2		2023AN3035	26 Jan 2024	PDF
AATCC 16 Light fastness		2023AN3035	26 Jan 2024	PDF

DRY AND WET RUBBING/CROCKING

Test	Condition	No.	Date	Download
BS EN ISO 105-X12 Rubbing dry/wet		2024AN0484	29 Feb 2024	PDF
AATCC 8 or 116 Dry/wet crocking		2024AN0484	29 Feb 2024	PDF

SEAM SLIPPAGE

Test	Condition	No.	Date	Download
BS EN ISO 13936-2		28514119	15 Mar 2024	PDF
ASTM D4034 Yarn slippage at a		23-003040	15	PDF

sewn seam

Feb
2024

FLAMMABILITY

Test	Condition	No.	Date	Download
BS EN 1021 1&2 Cigarette and Match	35 kg/m3 CMHR foam	23/61432Supp/10/23	02 Jan 2024	PDF
BS EN 1021-1 Cigarette	20-22 kg/m3 non-fire retardant polyurethane foam	23/61663/12/23	03 Jan 2024	PDF
CA TB 117-2013		23-003874	09 Jan 2024	PDF
ASTM E 84 Class 1(Unadhered)	Unadhered	3-54218-0	26 Dec 2023	PDF

VOC EMISSION

Test	Condition	No.	Date	Download
Ansi/Bifma VOC test M7.1		961098	24 Jan 2024	PDF

RESISTANCE TO BLEACH CLEANING

Test	Condition	No.	Date	Download
Internal test according BIFMA HCF 8.1 and ACT Method 1	1:10 Sodium Hypochlorite 5,25-6,25%		26 Feb 2024	PDF

MATERIAL SAFETY DATA SHEET

Test	Condition	No.	Date	Download
Material Safety Data Sheet			06 Feb 2024	PDF

LIFE CYCLE ASSESSMENT (LCA)

Test	Condition	No.	Date	Download
LCA Summary Report			14	PDF

CARE & MAINTENANCE

wash or dry cleaning P(W).

Contour Melange is made of polyester which is a material suited for environments with special requirements for cleaning.

Click here for guidance relating to disinfection. [Link to Stain Guide...](#)



60°C shrinkage max 1.0%



74°C shrinkage max 2.0%
