


CUBIC


COLOUR 40408890-61270

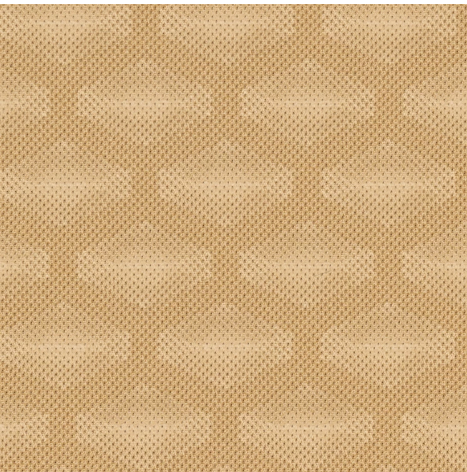

Please be aware that the colour shades can appear different from the real fabric colours. We advise you to request actual fabric samples before ordering.

COLOUR SCALE

Design no. 40408890 Cubic (140 cm/55") is available in 19 colours

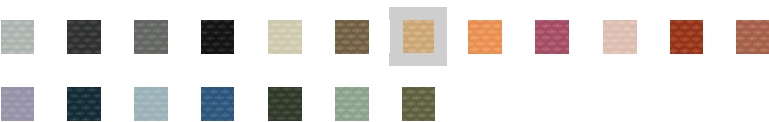

Cubic is designed with a three-layered construction that combines the high-performance, knitted polyester fabric Atlantic with a 5 mm foam core and a jersey backing. The fabric's 3D effect creates a captivating surface expression that shifts from matte to shiny and continuously transforms before your eyes, depending on the angle of the light.

Meets Möbelfakta requirements

Designed by: Gabriel Design Team
Colours designed by: Luisa Allegri



PRODUCT SPECIFICATIONS

CHARACTERISTICS

Design no.

40408890 — Cubic

Application

Upholstery

Composition

Fabric: Atlantic 100% polyester

Foam: 5mm 50 kg non fr pu foam

Backing: circular knit polyester

Weight

1060 g/lm — 34.19 oz/lin.yd

Width

140 cm — 55 inches

ENVIRONMENT

Environment, health, and safety

OEKO-TEX® STANDARD 100

Meets Möbelfakta requirements

PERFORMANCE

Abrasion

110,000 — rubs martindale (EN ISO 12947-2)

100,000 — double rubs wyzenbeek (ASTM D4157) (heavy duty upholstery)

Pilling

4-5 — scale 1-5, max. 5 (EN ISO 12945-2)

Light fastness

5-7 — scale 1-8, max. 8 (EN ISO 105-B02)

Rubbing fastness dry/wet

4-5/4-5 — scale 1-5, max. 5 (EN ISO 105x12)

Flammability

BS EN 1021 1&2 Cigarette and Match

BS EN 1021-1 Cigarette

CA TB 117-2013

ASTM E 84 Class 1(Adhered)

ASTM E 84 Class 1(Unadhered)

Will also pass other flammability standards.
Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemicals.

US ACT pass

 AATCC 8 or 116 Dry/wet crocking

 ASTM D4157-07 Wyz abrasion (heavy duty)
100k

 ASTM D3511 Pilling

 AATCC 16 Light fastness

 CA TB 117-2013

 ASTM E 84 Class 1(Adhered)

 ASTM E 84 Class 1(Unadhered)

Abrasion test results exceeding ACT
Performance Guidelines are not an indicator of
product lifespan. Multiple factors affect fabric
durability and appearance retention.

CERTIFICATES

ABRASION RESISTANCE

Test	Condition	No.	Date	Download
BS EN ISO 12947-2/14465	In accordance with EN 14465	28513199	07 Feb 2023	PDF
ASTM D4157-07 Wyz abrasion (heavy duty) 100k		22-004224	17 Mar 2023	PDF

PILLING

Test	Condition	No.	Date	Download
BS EN ISO 12945-2		28513199	07 Feb 2023	PDF
ASTM D3511 Pilling		22-004222	17 Mar 2023	PDF

COLOUR FASTNESS TO LIGHT

Test	Condition	No.	Date	Download
BS EN ISO 105 B02 Method 2		2022AN7461	13 Jan 2023	PDF
AATCC 16 Light fastness		22-004222	17 Mar 2023	PDF

DRY AND WET RUBBING/CROCKING

Test	Condition	No.	Date	Download
BS EN ISO 105-X12 Rubbing dry/wet		2022AN7461	13 Jan 2023	PDF
AATCC 8 or 116 Dry/wet crocking		22-004222	17 Mar 2023	PDF

FLAMMABILITY

Test	Condition	No.	Date	Download
------	-----------	-----	------	----------

BS EN 1021 1&2 Cigarette and Match	35 kg/m3 CMHR foam	23/60495A/12/22	17 Mar 2023	PDF
BS EN 1021-1 Cigarette	20-22 kg/m3 non-fire retardant polyurethane foam	23/61109/06/20	20 Jun 2023	PDF
CA TB 117-2013		22-004222	17 Mar 2023	PDF
ASTM E 84 Class 1(Adhered)	Adhered	24-001680	06 Aug 2024	PDF
ASTM E 84 Class 1(Unadhered)	Unadhered	24-001680	06 Aug 2024	PDF

COLOUR FASTNESS TO DRY CLEANING

Test	Condition	No.	Date	Download
BS EN ISO 105-D01		28513199	07 Feb 2023	PDF

RESISTANCE TO BLEACH CLEANING

Test	Condition	No.	Date	Download
Internal test according BIFMA HCF 8.1 and ACT Method 1	1:10 Sodium Hypochlorite 5,25-6,25%		20 Jun 2023	PDF

MATERIAL SAFETY DATA SHEET

Test	Condition	No.	Date	Download
Material Safety Data Sheet			17 May 2023	PDF

CARE & MAINTENANCE

Wipe with a damp cloth.