


FUTURE LOOP

COLOUR 2571-67137

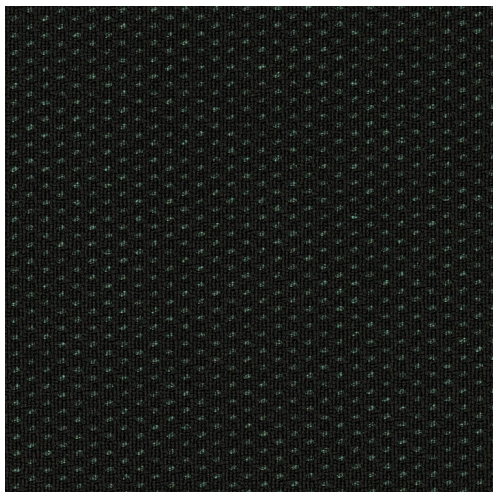

Please be aware that the colour shades can appear different from the real fabric colours. We advise you to request actual fabric samples before ordering.

COLOUR SCALE

Design no. 2571 Future Loop (140 cm/55") is available in 8 colours



Future Loop is a pioneering innovation based on textile-to-textile recycling and carefully crafted from a blend of reclaimed textile waste and post-consumer recycled polyester. 100% recycled and fully recyclable. Future Loop is a woven textile with a futuristic expression, featuring a black front side and a coloured reverse side. With unexpected, almost architectural forms and intricate, expressive perforated textures, Future Loop is a statement piece that redefines black within a modern context.

100% recyclable polyester

Meets Möbelfakta requirements

Design and colours are developed by Cenk Kivrikoglu



PRODUCT SPECIFICATIONS

CHARACTERISTICS

Design no.

2571 — Future Loop

Application

Upholstery

Composition

92% Post-consumer recycled polyester, 8% Post-industrial recycled polyester

Weight

638 g/lm — 20.58 oz/lin.yd

Width

140 cm — 55 inches

ENVIRONMENT

Environment, health, and safety

[OEKO-TEX® STANDARD 100](#)

[EU Ecolabel](#)

Meets Möbelfakta requirements

VOC emission

[Ansi/Bifma VOC test M7.1](#)

PERFORMANCE

Abrasion

100,000 — rubs martindale (EN ISO 12947-2)

100,000 — double rubs wyzenbeek (ASTM D4157)
(heavy duty upholstery)

Pilling

4-5 — scale 1-5, max. 5 (EN ISO 12945-2)

Light fastness

7-8 — scale 1-8, max. 8 (EN ISO 105-B02)

Rubbing fastness dry/wet

4-5/4-5 — scale 1-5, max. 5 (EN ISO 105x12)

Flammability

[CA TB 117-2013](#)

[BS EN 1021-1 Cigarette](#)

[BS EN 1021 1&2 Cigarette and Match](#)

Will also pass other flammability standards.

Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemicals.

US ACT pass

 [AATCC 8 or 116 Dry/wet crocking](#)

 [ASTM D4157-07 Wyz abrasion \(heavy duty.\)](#)
[100k](#)

 [ASTM D3511 Pilling](#)

 [AATCC 16 Light fastness](#)

 [CA TB 117-2013](#)

Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

CERTIFICATES

ABRASION RESISTANCE

Test	Condition	No.	Date	Download
BS EN ISO 12947-2/14465	In accordance with EN 14465	28511148	24	PDF

Oct
2023

ASTM D4157-07 Wyz abrasion
(heavy duty) 100k

23-003122

02 [PDF](#)
Nov
2023

PILLING

Test	Condition	No.	Date	Download
BS EN ISO 12945-2		28511148	24 Oct 2023	PDF
ASTM D3511 Pilling		23-003122	02 Nov 2023	PDF

COLOUR FASTNESS TO LIGHT

Test	Condition	No.	Date	Download
BS EN ISO 105 B02 Method 2		2023AN2388	25 Oct 2023	PDF
AATCC 16 Light fastness		2023AN2588	25 Oct 2023	PDF

DRY AND WET RUBBING/CROCKING

Test	Condition	No.	Date	Download
AATCC 8 or 116 Dry/wet crocking		2023AN2984	02 Jan 2024	PDF
BS EN ISO 105-X12 Rubbing dry/wet		2023AN2984	02 Jan 2024	PDF

BREAKING FORCE

Test	Condition	No.	Date	Download
ASTM D5034 Breaking force		23-003122	02 Nov 2023	PDF

SEAM SLIPPAGE

Test	Condition	No.	Date	Download
ASTM D4034 Yarn slippage at a sewn seam		3-003122-0	02 Nov 2023	PDF
BS EN ISO 13936-2		28514117	03 Nov 2023	PDF

FLAMMABILITY

Test	Condition	No.	Date	Download
CA TB 117-2013		23-003122	02 Nov 2023	PDF
BS EN 1021-1 Cigarette	20-22 kg/m3 non-fire retardant polyurethane foam	23/61431A/10/23	10 Oct 2023	PDF
BS EN 1021 1&2 Cigarette and Match	35 kg/m3 CMHR foam	23/61431B/10/23	12 Oct 2023	PDF

COLOUR FASTNESS TO PERSPIRATION

Test	Condition	No.	Date	Download
BS EN ISO 105-E04		28514117	03 Nov 2023	PDF

WASH STABILITY

Test	Condition	No.	Date	Download
BS EN ISO 6330 6M 60 C PC Flat dry	Dimensional Stability to Washing at 60dg.C	2023AN2387	08 Nov 2023	PDF
BS EN ISO 6330 3A 74C PC Flat Dry		2023AN2387	08 Nov 2023	PDF

RESISTANCE TO BLEACH CLEANING

Test	Condition	No.	Date	Download
Internal test according BIFMA HCF 8.1 and ACT Method 1	1:10 Sodium Hypochlorite 5,25-6,25%		11 Jan	PDF

VOC EMISSION

Test	Condition	No.	Date	Download
Ansi/Bifma VOC test M7.1			24 Jan 2024	PDF

MATERIAL SAFETY DATA SHEET

Test	Condition	No.	Date	Download
Material Safety Data Sheet			04 Oct 2023	PDF

CARE & MAINTENANCE

Wash or dry cleaning P(W).

Future Loop is made of polyester which is a material suited for environments with special requirements for cleaning.

Click here for guidance relating to disinfection. [Link to Stain Guide...](#)



60°C shrinkage max 2.0%



74°C shrinkage max 3.0%