


PARCEL LOOP


COLOUR 2319-2301

Please be aware that the colour shades can appear different from the real fabric colours. We advise you to request actual fabric samples before ordering.

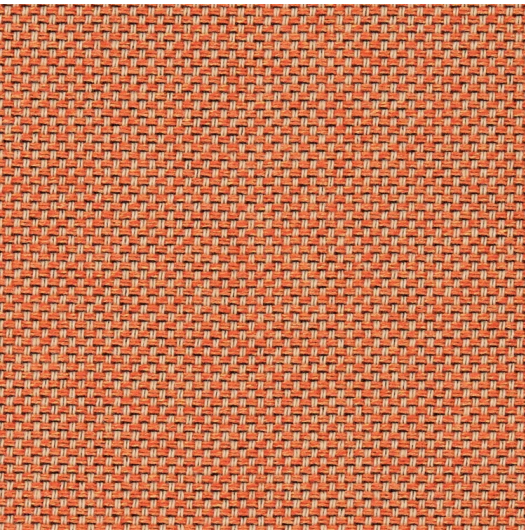

COLOUR SCALE

Design no. 2319 Parcel Loop (140 cm/55") is available in 24 colours

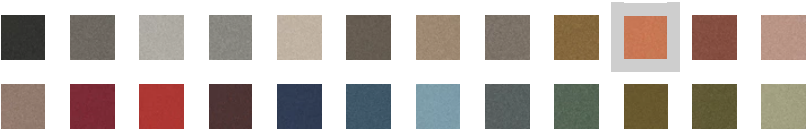

Parcel Loop presents a dynamic and lively colour palette, complemented by a notably soft and heathered texture. Its versatile design, featuring a multi-directional structure, makes it suitable for furniture, panels, and various applications in between.

100% recyclable polyester
Meets Möbelfakta requirements

Design and colours are developed by Cenk Kivrikoglu/Luisa Allegri



PRODUCT SPECIFICATIONS

CHARACTERISTICS

Design no.

2319 — Parcel Loop

Application

Upholstery

Panel

Composition

100% post-consumer/post-industrial recycled polyester (contains 3% textile waste)

Weight

480 g/lm — 15.48 oz/lin.yd

Width

140 cm — 55 inches

ENVIRONMENT

Environment, health, and safety

[OEKO-TEX® STANDARD 100](#)

[EU Ecolabel](#)

Meets Möbelfakta requirements

PERFORMANCE

Abrasion

100,000 — rubs martindale (EN ISO 12947-2)

100,000 — double rubs wyzenbeek (ASTM D4157) (heavy duty upholstery)

Pilling

4-5 — scale 1-5, max. 5 (EN ISO 12945-2)

Light fastness

6-8 — scale 1-8, max. 8 (EN ISO 105-B02)

Rubbing fastness dry/wet

4-5/4-5 — scale 1-5, max. 5 (EN ISO 105x12)

Flammability

[BS EN 1021-1 Cigarette](#)

[BS EN 1021 1&2 Cigarette and Match](#)

[CA TB 117-2013](#)

[ASTM E 84 Class 1\(Unadhered\)](#)

Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemicals.

US ACT pass

 [ASTM D4157-07 Wyz abrasion \(heavy duty\)](#)

 [ASTM D3511 Pilling](#)

 [AATCC 16 Light fastness](#)

 [AATCC 8 or 116 Dry/wet crocking](#)

 [CA TB 117-2013](#)

 [ASTM E 84 Class 1\(Unadhered\)](#)

Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

CERTIFICATES

ABRASION RESISTANCE

Test	Condition	No.	Date	Download
------	-----------	-----	------	----------

BS EN ISO 12947-2/14465	In accordance with EN 14465	28513643	20 Jun 2023	PDF
-------------------------	-----------------------------	----------	-------------------	---------------------

ASTM D4157-07 Wyz abrasion (heavy duty)		23-001728	07 Jun 2023	PDF
--	--	-----------	-------------------	---------------------

PILLING

Test	Condition	No.	Date	Download
BS EN ISO 12945-2		28513643	20 Jun 2023	PDF
ASTM D3511 Pilling		23-001729	07 Jun 2023	PDF

COLOUR FASTNESS TO LIGHT

Test	Condition	No.	Date	Download
BS EN ISO 105 B02 Method 2		2023AN1368	27 Jun 2023	PDF
BS EN ISO 105 B02 Method 2		2024AN0489	13 Mar 2024	PDF
AATCC 16 Light fastness		2023AN1958	25 Aug 2023	PDF
AATCC 16 Light fastness		2024AN0489	13 Mar 2024	PDF

DRY AND WET RUBBING/CROCKING

Test	Condition	No.	Date	Download
BS EN ISO 105-X12 Rubbing dry/wet		2023AN1368	27 Jun 2023	PDF
BS EN ISO 105-X12 Rubbing dry/wet		2024AN1101	20 May 2024	PDF
AATCC 8 or 116 Dry/wet crocking		2023AN1958	25	PDF

Aug
2023

FLAMMABILITY

Test	Condition	No.	Date	Download
BS EN 1021-1 Cigarette	20-22 kg/m3 non-fire retardant polyurethane foam	23/61049A/06/23	16 Jun 2023	PDF
BS EN 1021 1&2 Cigarette and Match	35 kg/m3 CMHR foam	23/61049/05/23	06 Jun 2023	PDF
CA TB 117-2013		23-001984	26 Jun 2023	PDF
ASTM E 84 Class 1(Unadhered)		23-002646	21 Sep 2023	PDF

SEAM SLIPPAGE

Test	Condition	No.	Date	Download
BS EN ISO 13936-2		28513643	20 Jun 2023	PDF
ASTM D4034 Yarn slippage at a sewn seam		23-001728	07 Jun 2023	PDF

BREAKING FORCE

Test	Condition	No.	Date	Download
ASTM D5034 Breaking force		23-001984	26 Jun 2023	PDF

RESISTANCE TO BLEACH CLEANING

Test	Condition	No.	Date	Download
Internal test according BIFMA HCF 8.1 and ACT Method 1			21 May 2024	PDF

MATERIAL SAFETY DATA SHEET

Test	Condition	No.	Date	Download
Material Safety Data Sheet			29 Jun 2023	PDF

CARE & MAINTENANCE

wash or dry cleaning P(W).

Parcel Loop is made of polyester which is a material suited for environments with special requirements for cleaning.

Click here for guidance relating to disinfection. [Link to Stain Guide...](#)



60°C shrinkage max 1.5%



74°C shrinkage max 2.0%