

CURA LOOP


COLOUR 2615-61233



Please be aware that the colour shades can appear different from the real fabric colours. We advise you to request actual fabric samples before ordering.

COLOUR SCALE

Design no. 2615 Cura Loop (140 cm/55") is available in 30 colours

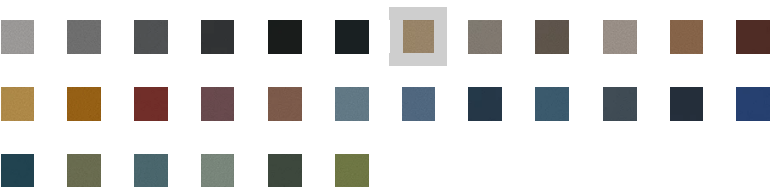

Cura Loop is made from 100% textile waste and is fully recyclable. The construction, specifications and visual character is identical to our well-known Cura. With its soft volume and relaxed character, Cura Loop offers high performance wrapped in a natural, understated look. The fabric's matte surface and subtle melange effect evoke the feel of natural fibres; bringing warmth, comfort and timeless elegance to any furniture design.

100% recyclable polyester
Meets Möbelfakta requirements

Design and colours are developed by Cenk Kivrikoglu



PRODUCT SPECIFICATIONS

CHARACTERISTICS

Design no.

2615 — Cura Loop

Application

Upholstery

Composition

100% post-consumer/post-industrial rec.pes (100 % textile waste)

Weight

420 g/lm — 13.55 oz/lin.yd

Width

140 cm — 55 inches

ENVIRONMENT

Environment, health, and safety

[OEKO-TEX® STANDARD 100](#)

[EU Ecolabel](#)

Meets Möbelfakta requirements

PERFORMANCE

Abrasion

100,000 — rubs martindale BS EN 14465 (ISO 12947-2)

100,000 — double rubs wyzenbeek (ASTM D4157) (heavy duty upholstery)

Pilling

4-5 — scale 1-5, max. 5 (EN ISO 12945-2)

Light fastness

6-8 — scale 1-8, max. 8 (EN ISO 105-B02)

Rubbing fastness dry/wet

4-5/4-5 — scale 1-5, max. 5 (EN ISO 105x12)

Flammability

[BS EN 1021-1 Cigarette](#)

[BS EN 1021-2 Match](#)

[DIN EN 13501-1 B-s1,d0](#)

[CA TB 117-2013](#)

[ASTM E 84 Class 1\(Unadhered\)](#)

Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemicals.

US ACT pass

 [CA TB 117-2013](#)

 [ASTM E 84 Class 1\(Unadhered\)](#)

 [ASTM D4157-07 Wyz abrasion \(heavy duty.\) 100k](#)

 [ASTM D3511 Pilling](#)

 [AATCC 16 Light fastness](#)

 [AATCC 8 or 116 Dry/wet crocking](#)

Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

CERTIFICATES

ABRASION RESISTANCE

Test	Condition	No.	Date	Download
BS EN ISO 12947-2/14465	In accordance with EN 14465	28515531	21 Feb 2025	PDF
ASTM D4157-07 Wyz abrasion (heavy duty) 100k		25-000197	29 Jan 2025	PDF

PILLING

Test	Condition	No.	Date	Download
BS EN ISO 12945-2		28515531	21 Feb 2025	PDF
ASTM D3511 Pilling		25-000197	29 Jan 2025	PDF

COLOUR FASTNESS TO LIGHT

Test	Condition	No.	Date	Download
BS EN ISO 105 B02 Method 2		2025AN0932	16 Apr 2025	PDF
AATCC 16 Light fastness		2025AN0932	16 Apr 2025	PDF

DRY AND WET RUBBING/CROCKING

Test	Condition	No.	Date	Download
BS EN ISO 105-X12 Rubbing dry/wet		2025AN1354	22 May 2025	PDF
AATCC 8 or 116 Dry/wet crocking		2025AN1354	22 May 2025	PDF

SEAM SLIPPAGE

Test	Condition	No.	Date	Download
BS EN ISO 13936-2		28515531	21 Feb 2025	PDF
ASTM D4034 Yarn slippage at a sewn seam		25-000197	29 Jan	PDF

WASH STABILITY

Test	Condition	No.	Date	Download
BS EN ISO 6330 6M 60 C PC Flat dry	Dimensional Stability to Washing at 60dg.C	28515531	21 Feb 2025	PDF

FLAMMABILITY

Test	Condition	No.	Date	Download
BS EN 1021-1 Cigarette	20-22 kg/m3 non-fire retardant polyurethane foam	23/62763	21 Jan 2025	PDF
BS EN 1021-2 Match	35 kg/m3 CMHR foam	23/62763	23 Jan 2025	PDF
DIN EN 13501-1 B-s1,d0	Unadhered	25AN1064	22 Apr 2025	PDF
CA TB 117-2013		25-000197	29 Jan 2025	PDF
ASTM E 84 Class 1(Unadhered)	Unadhered	25-000197	14 Feb 2025	PDF

BREAKING FORCE

Test	Condition	No.	Date	Download
ASTM D5034 Breaking force		25-000197	29 Jan 2025	PDF

RESISTANCE TO BLEACH CLEANING

Test	Condition	No.	Date	Download
Internal test according BIFMA HCF 8.1 and ACT Method 1	1:10 Sodium Hypochlorite 5,25-6,25%		19 May 2025	PDF

MATERIAL SAFETY DATA SHEET

Test	Condition	No.	Date	Download
Material Safety Data Sheet			20 Jan	PDF

CARE & MAINTENANCE

Wash or dry cleaning P(W).

Cura Loop is made of polyester which is a material suited for environments with special requirements for cleaning.

Click here for guidance relating to disinfection. [Link to Stain Guide...](#)



60°C shrinkage max 1.0%
