


SOFTNEXT


COLOUR 2328-2301

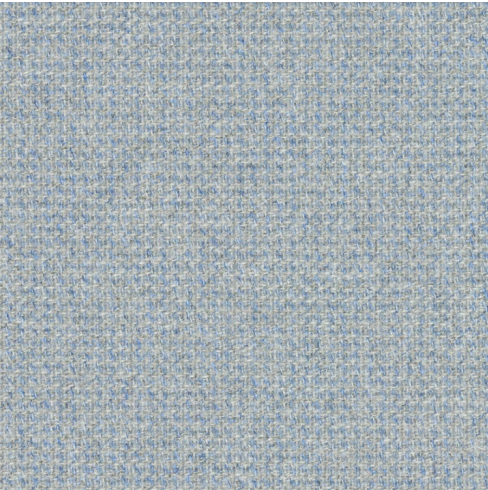

Please be aware that the colour shades can appear different from the real fabric colours. We advise you to request actual fabric samples before ordering.

COLOUR SCALE

Design no. 2328 SoftNext (140 cm/55") is available in 20 colours



Made from 100% post-consumer recycled polyester, SoftNext combines environmental responsibility with exceptional quality.

100% recyclable polyester
Meets Möbelfakta requirements

Design and colours are developed by Luisa Allegri



PRODUCT SPECIFICATIONS

CHARACTERISTICS

Design no.

2328 — SoftNext

Application

Upholstery

Panel

Composition

100% Post-consumer recycled polyester

Weight

425 g/lm — 13.71 oz/lin.yd

Width

140 cm — 55 inches

ENVIRONMENT

Environment, health, and safety

Meets Möbelfakta requirements

Life Cycle Assessment (LCA)

[LCA Summary Report](#)

PERFORMANCE

Abrasion

80,000 — rubs martindale (EN ISO 12947-2)

60,000 — double rubs wyzenbeek (ASTM D4157)
(heavy duty upholstery)

Pilling

4-5 — scale 1-5, max. 5 (EN ISO 12945-2)

Light fastness

7-8 — scale 1-8, max. 8 (EN ISO 105-B02)

Rubbing fastness dry/wet

4-5/4-5 — scale 1-5, max. 5 (EN ISO 105x12)

Flammability

[BS EN 1021-1 Cigarette](#)

[BS EN 1021 1&2 Cigarette and Match](#)

[CA TB 117-2013](#)

[ASTM E 84 Class 1\(Adhered\)](#)

Will also pass other flammability standards.

Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemicals.

US ACT pass

 [ASTM D4157-07 Wyz abrasion \(heavy duty.\)](#)

 [ASTM D3511 Pilling](#)

 [AATCC 16 Light fastness](#)

 [AATCC 8 or 116 Dry/wet crocking](#)

 [CA TB 117-2013](#)

 [ASTM E 84 Class 1\(Adhered\)](#)

Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

CERTIFICATES

ABRASION RESISTANCE

Test	Condition	No.	Date	Download
------	-----------	-----	------	----------

BS EN ISO 12947-2/14465	In accordance with EN 14465	28513551	30 May 2023	PDF
ASTM D4157-07 Wyz abrasion (heavy duty)		23-001468	07 Jun 2023	PDF
PILLING				
Test	Condition	No.	Date	Download
BS EN ISO 12945-2		28513551	30 May 2023	PDF
ASTM D3511 Pilling		23-001469	07 Jun 2023	PDF
COLOUR FASTNESS TO LIGHT				
Test	Condition	No.	Date	Download
BS EN ISO 105 B02 Method 2		2024AN0490	13 Mar 2024	PDF
AATCC 16 Light fastness		2024AN0490	13 Mar 2024	PDF
DRY AND WET RUBBING/CROCKING				
Test	Condition	No.	Date	Download
BS EN ISO 105-X12 Rubbing dry/wet		2024AN0990	07 May 2024	PDF
AATCC 8 or 116 Dry/wet crocking		2024AN0990	07 May 2024	PDF
FLAMMABILITY				
Test	Condition	No.	Date	Download
BS EN 1021-1 Cigarette	20-22 kg/m3 non-fire retardant polyurethane foam	23/60969C/06/23	16 Jun 2023	PDF

BS EN 1021 1&2 Cigarette and Match	35 kg/m3 CMHR foam	23/60969B/04/23	06 Jun 2023	PDF
CA TB 117-2013		23-001985	26 Jun 2023	PDF
ASTM E 84 Class 1(Adhered)	Adhered	23-002473	31 Aug 2023	PDF

SEAM SLIPPAGE

Test	Condition	No.	Date	Download
BS EN ISO 13936-2		28513551	30 May 2023	PDF
ASTM D4034 Yarn slippage at a sewn seam		23-001470	07 Jun 2023	PDF

BREAKING FORCE

Test	Condition	No.	Date	Download
ASTM D5034 Breaking force		23-001985	26 Jun 2023	PDF

RESISTANCE TO BLEACH CLEANING

Test	Condition	No.	Date	Download
Internal test according BIFMA HCF 8.1 and ACT Method 1	1:10 Sodium Hypochlorite 5,25-6,25%		29 Jun 2023	PDF
Internal test according BIFMA HCF 8.1 and ACT Method 1	1:10 Sodium Hypochlorite 5,25-6,25%		21 May 2024	PDF

MATERIAL SAFETY DATA SHEET

Test	Condition	No.	Date	Download
Material Safety Data Sheet			29 Jun 2023	PDF

LIFE CYCLE ASSESSMENT (LCA)

Test	Condition	No.	Date	Download
LCA Summary Report			11 Nov 2024	PDF

CARE & MAINTENANCE

wash or dry cleaning P(W).

SoftNext is made of polyester which is a material suited for environments with special requirements for cleaning.

click here for guidance relating to disinfection.

[Link to Stain Guide...](#)



60°C shrinkage max 2.0%



74°C shrinkage max 3.0%