


TAILOR

COLOUR 2376-60364

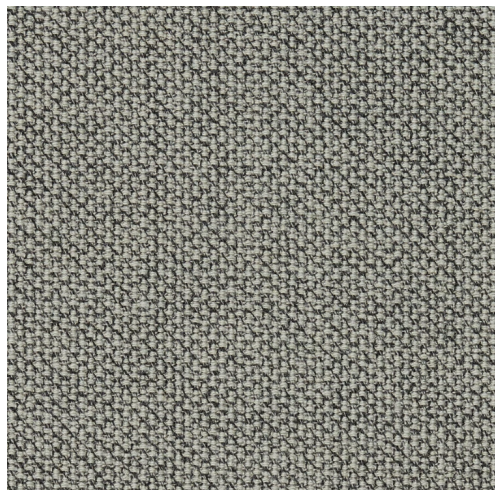

Please be aware that the colour shades can appear different from the real fabric colours. We advise you to request actual fabric samples before ordering.

COLOUR SCALE

Design no. 2376/2377 Tailor (140 cm/55") is available in 26 colours



Wool fabric Tailor is inspired by the beauty of nature and is characterised by a tactile and visually melange structure that mimics the appearance of natural fibres and linen textures. With its adaptability to both aesthetics and the feel-good factor, Tailor is an ideal choice for soft seating, where comfort takes centre stage.

Meets Möbelfakta requirements

Design and colours are developed by Cenk Kivrikoglu



STANDARD
100
1076-182
DTI
www.oeko-tex.com



PRODUCT SPECIFICATIONS

CHARACTERISTICS

Design no.

2376 / 2377 — Tailor

Application

Upholstery

Panel

PERFORMANCE

Abrasion

110,000 — rubs martindale (EN ISO 12947-2)

80,000 — rubs martindale (ASTM D4966) (heavy duty upholstery)

Pilling

4-5 — scale 1-5, max. 5 (EN ISO 12945-2)

Composition

90% New Zealand wool, 10% Polyamide

Weight

495 g/lm — 15.97 oz/lin.yd

Width

140 cm — 55 inches

ENVIRONMENT

Environment, health, and safety

Meets Möbelfakta requirements

VOC emission

[Ansi/Bifma VOC test M7.1](#)

Light fastness

5-7 — scale 1-8, max. 8 (EN ISO 105-B02)

Rubbing fastness dry/wet

4-5/4-5 — scale 1-5, max. 5 (EN ISO 105x12)

Flammability

[BS EN 1021 1&2 Cigarette and Match](#)

[BS 5852 Part 1 0,1 Cigarette & Match, The Furniture and Furnishing Regulations 1988](#)

[BS 5852 Crib 5](#)

[Class Uno UNI 9175 Class 1 I EMME](#)

[CA TB 117-2013](#)

[ASTM E 84 Class 1\(Unadhered\)](#)

[IMO MSC 307\(88\) Annex 1 part 8](#)

[IMO MSC 307\(88\) Annex 1 part 8 UK](#)

[MED Certificate IMO](#)

[MED Certificate IMO UK](#)

Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemicals.

US ACT pass

 [ASTM D4966 Martindale \(heavy duty\)](#)

 [ASTM D4970 Pilling](#)

 [AATCC 16 Light fastness](#)

 [AATCC 8 or 116 Dry/wet crocking](#)

 [CA TB 117-2013](#)

 [ASTM E 84 Class 1\(Unadhered\)](#)

Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

CERTIFICATES

ABRASION RESISTANCE

Test	Condition	No.	Date	Download
BS EN ISO 12947-2/14465	In accordance with EN	28514383	20	PDF

14465

Feb
2024

ASTM D4966 Martindale (heavy duty)

24-000220

13 [PDF](#)
Feb
2024**PILLING**

Test	Condition	No.	Date	Download
BS EN ISO 12945-2		28514383	20 Feb 2024	PDF
ASTM D4970 Pilling		23-003915	05 Jan 2024	PDF

COLOUR FASTNESS TO LIGHT

Test	Condition	No.	Date	Download
BS EN ISO 105 B02 Method 2		2024AN0004	31 Jan 2024	PDF
AATCC 16 Light fastness		2024AN0004	31 Jan 2024	PDF

DRY AND WET RUBBING/CROCKING

Test	Condition	No.	Date	Download
BS EN ISO 105-X12 Rubbing dry/wet		2024AN0645	08 Apr 2024	PDF
AATCC 8 or 116 Dry/wet crocking		2024AN0645	05 Jan 2024	PDF

SEAM SLIPPAGE

Test	Condition	No.	Date	Download
BS EN ISO 13936-2		28514383	20 Feb 2024	PDF
ASTM D4034 Yarn slippage at a sewn seam		23-003915	05 Jan	PDF

BREAKING FORCE

Test	Condition	No.	Date	Download
ASTM D5034 Breaking force		23-003915	05 Jan 2024	PDF

FLAMMABILITY

Test	Condition	No.	Date	Download
BS EN 1021 1&2 Cigarette and Match	20-22 kg/m3 non-fire retardant polyurethane foam	23/61677B/01/24	09 Jan 2024	PDF
BS 5852 Part 1 0,1 Cigarette & Match, The Furniture and Furnishing Regulations 1988	20-22 kg/m3 non-fire retardant polyurethane foam	23/61777/02/24	13 Feb 2024	PDF
BS 5852 Crib 5	50 kg/m3 CMHR foam	23/61750/02/24	06 Feb 2024	PDF
Class Uno UNI 9175 Class 1 I EMME	26 kg/m3 CMHR foam	370458/1	03 Jun 2024	PDF
CA TB 117-2013		23-003915	05 Jan 2024	PDF
ASTM E 84 Class 1(Unadhered)	Unadhered	23-003915	22 Jan 2024	PDF
IMO EC Declaration of Conformity EU,UK			16 Jan 2025	PDF
IMO MSC 307(88) Annex 1 part 8		SH01671	09 Jan 2025	PDF
IMO MSC 307(88) Annex 1 part 8 UK		53163	09 Jan 2025	PDF
MED Certificate IMO		SH01685	07 Feb 2025	PDF

MED Certificate IMO UK

53166

07 [PDF](#)
Feb
2025

VOC EMISSION

Test	Condition	No.	Date	Download
Ansi/Bifma VOC test M7.1		237145-C	13 Mar 2024	PDF

MATERIAL SAFETY DATA SHEET

Test	Condition	No.	Date	Download
Material Safety Data Sheet			16 Feb 2024	PDF

CARE & MAINTENANCE

Dry cleaning P(S).

