


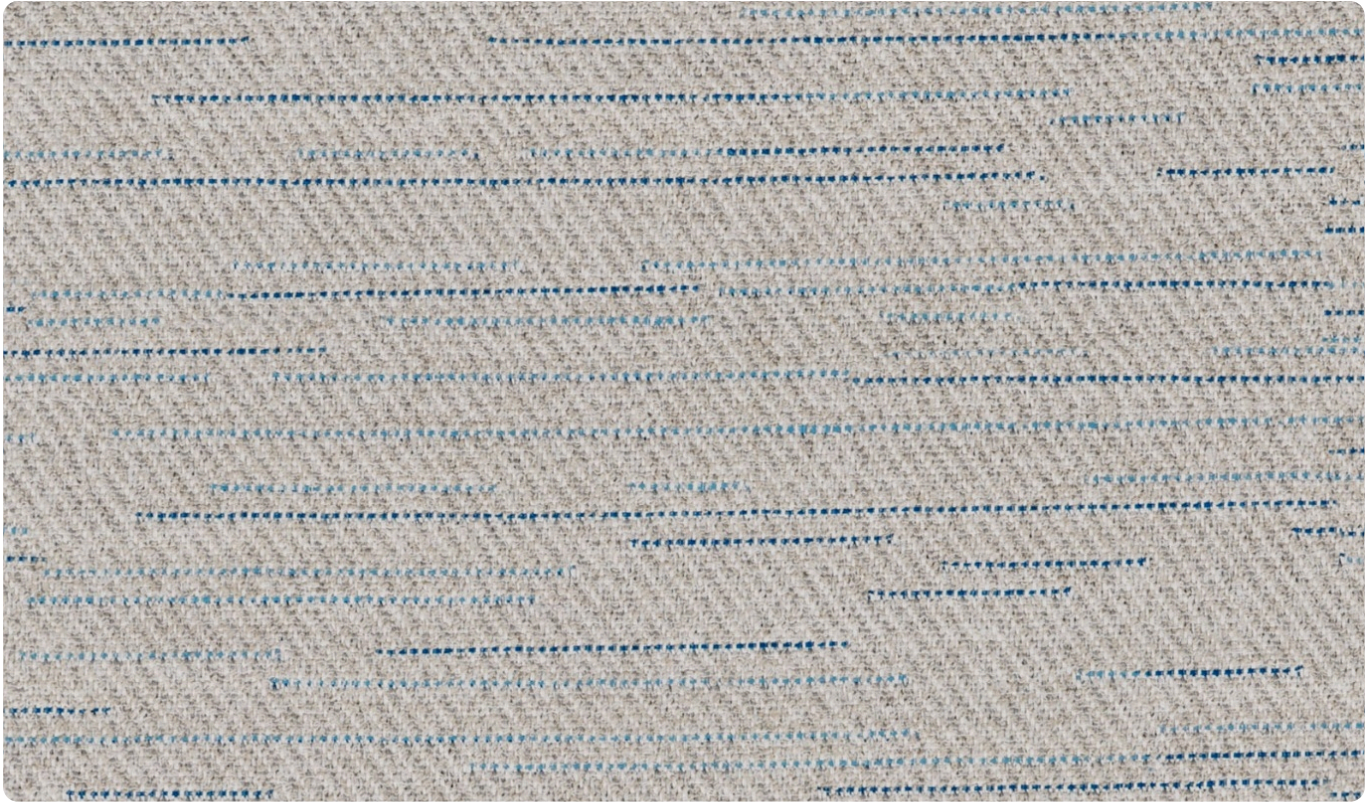

Xorel Corsica

\$64.00 /yd.

6345 Carnegie Xorel^{LUXE}

Additional surcharge may apply. Contact our [Client Experience](#) team for quotes.

Specifications

Type: Suitable for Indoor and Outdoor use, Wrapped Panels

Backing: Unbacked

Backing Note(s): Acrylic: This backing provides a coating to enhance adhesion and prevent bleed through of adhesives (15 yard minimum), Heavy Acrylic: This backing provides a coating to enhance adhesion and prevent bleed through of adhesives and is preferred for heavier duty installs such as moveable wall systems (15 yard minimum), Unbacked: Acoustically transparent, highly tackable, ability to self heal, yarns can "move back" into position. Highly stable on panels and does not react to changes in humidity or moisture.

Available Backing(s): Acrylic, Heavy Acrylic

Finish(es): Finish-Free

Width: 54" (137 cm)

Repeat: 17.75" (45 cm) Length x 54" (137 cm) Width
Full width repeat

Weight per Linear Yard: 16.5 oz

Contents: 51% Biobased Xorel PE, 49% Polypropylene

Cleaning Code: WS & BC - Water/Solvent & Bleach Cleanable

Flammability: ASTM E84 Class A / Class 1

Lightfastness: 2,000 hours lightfastness

Manufactured In: EU

Warranty: 5 years

ACT Symbols: 

Sustainability

Standards and Certifications: California Proposition 65, Cradle to Cradle Certified Gold, Cradle to Cradle Material Health Platinum Certification, HHI (Healthier Hospitals Initiative), Kaiser Permanente, LEED, Living Product Certified, Meets California Indoor Air Quality Specification CA 01350, MindClick Rated - Leader, Mindful Materials, RoHS & Reach compliant, SCS Indoor Advantage™ Gold, TUV Austria OK biobased - Level 2 (ASTM D6866), USDA Certified Biobased Product

Content: 51% Biobased content derived from rapidly renewable plant based resources

Free of: Antimicrobials, Antimony, Bisphenol A (BPA), Chlorine, DMF, Fluorocarbons, Formaldehyde, Halogenated fire retardants, Heavy metals, Ozone-depleting chemicals, PFAS, PFC, Phthalates, Plasticizers, PVC, Red List Chemicals, Solvents, Stain resistant finishes

Additional Details: Antibacterial, Extremely low VOCs, Inherently antimicrobial - in accordance with Test Method AATCC 147, Inherently flame resistant, No topical finishes, Responsible Return Program, Safely disposable, No California Proposition 65 warning required

Colors

