


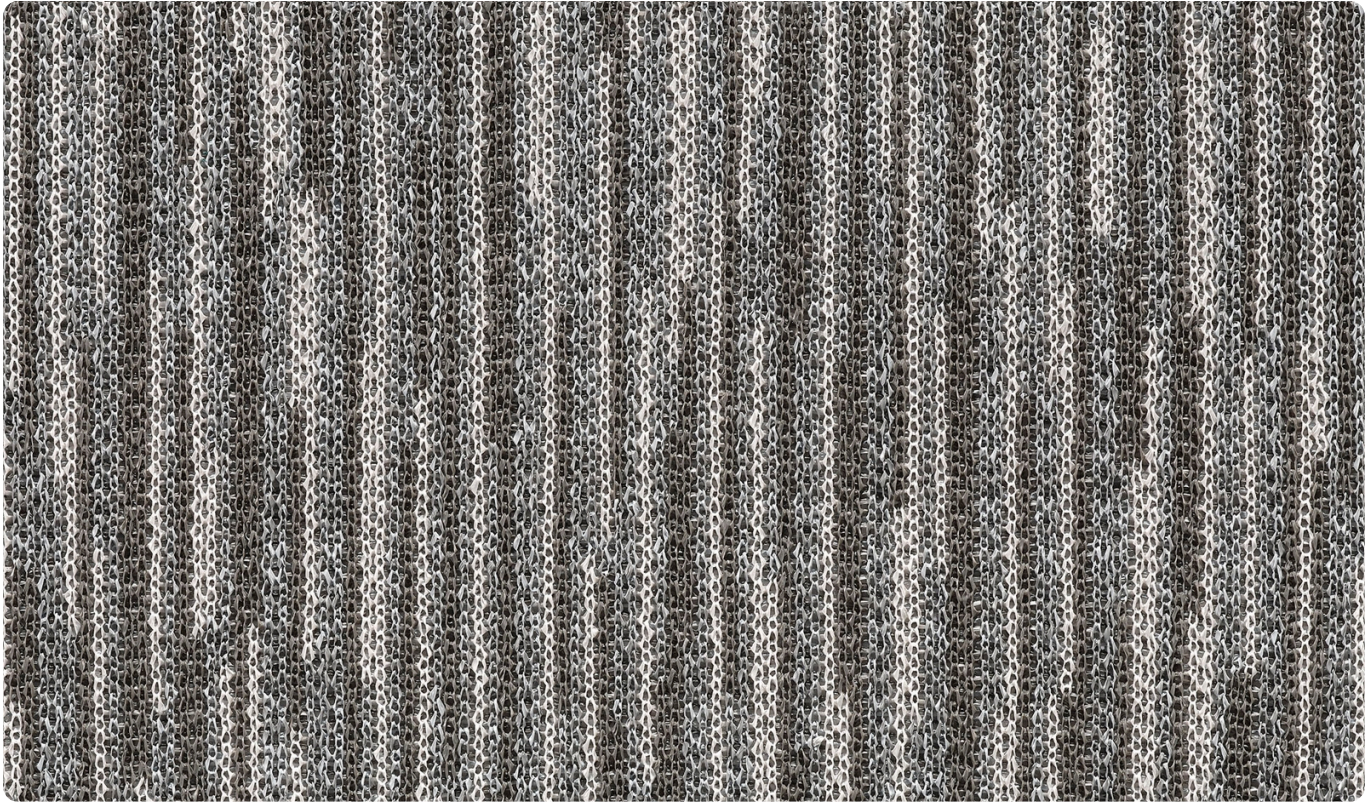

Xorel Zion

6111 Carnegie Xorel®
INDOOR / OUTDOOR

\$84.00 /yd.

Additional surcharge may apply. Contact our [Client Experience](#) team for quotes.

Specifications

Type: Suitable for Indoor and Outdoor use

Backing: Unbacked

Backing Note(s): X-Protect Sit: A proprietary technology which prevents stains and moisture from passing through textile to the seat cushion., X-Protect Sit backing can be added for an additional \$5 per yard (minimum 5 yards), and will modify the fabric width to 54"

Available Backing(s): X-Protect™ Sit

Finish(es): Finish-Free

Durability: No wear 100,000 double rubs

Width: 59" (150 cm)

Repeat: 30" (76 cm) Length
Full width repeat

Weight per Linear Yard: 14.4 oz

Contents: 100% Xorel® (85% Biobased PE, 15% PE)

Cleaning Code: WS & BC - Water/Solvent & Bleach Cleanable

Flammability: California Technical Bulletin 117-2013

Lightfastness: 3,000 hours lightfastness

Manufactured In: EU

Warranty: 7 years

Sustainability

Standards and Certifications: California Proposition 65, Cradle to Cradle Certified Gold, Cradle to Cradle Material Health Platinum Certification, Environmental Product Declaration (EPD), HHI (Healthier Hospitals Initiative), Kaiser Permanente, LEED, Living Product Certified, Manufacturer ISO 9001/14001 certified, MindClick Rated - Leader, Mindful Materials, Oeko-tex Standard 100, RoHS & Reach compliant, SCS Indoor Advantage™ Gold, TUV Austria OK biobased - Level 4 (ASTM D6866), USDA Certified Biobased Product

Content: 85% Biobased content derived from rapidly renewable plant based resources

Free of: Antimicrobials, Antimony, Bisphenol A (BPA), Chlorine, DMF, Fluorocarbons, Formaldehyde, Halogenated fire retardants, Heavy metals, Ozone-depleting chemicals, PFC, Phthalates, Plasticizers, PVC, Solvents, Stain resistant finishes

Additional Details: Antibacterial, Extremely low VOCs, Inherently antimicrobial - in accordance with Test Method AATCC 147, No topical finishes, Responsible Return Program, Safely disposable, No California Proposition 65 warning required

Colors

